



1.25Gbps 1550nm SMF 30km SFP Optical Transceiver with Duplex LC Connector

Model No. CS15D-24F-3S-Tx-LD

FEATURES

- RoHS compliant
- Compliant with IEEE802.3z Gigabit Ethernet
- Compliant with SFF8472 diagnostic monitoring interface
- Compliant with Fiber Channel 100-SM-LL-L standard
- Hot pluggable
- Single power supply 3.3V
- Duplex LC connector
- Differential LVPECL inputs and outputs
- TTL signal detect indicator
- Class 1 laser product compliant with EN 60825-1
- Input/Output: AC/AC



DIAGNOSTICS

| PARAMETER | RANGE | ACCURACY | UNIT | CALIBRATION |
|--------------|-----------|----------|------|-------------|
| Temperature | -40 to 95 | ±3 | °C | External |
| Voltage | 0 to VCC | ±0.1 | V | |
| Bias Current | 0 to 120 | ±5 | mA | |
| TX Power | -12 to +0 | ±3 dB | dBm | |
| RX Power | -21 to -3 | ±3 dB | dBm | |

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | MIN | MAX | UNIT |
|---------------------|-----------------|------|-----------------|------|
| Storage Temperature | T _S | -40 | 85 | °C |
| Supply Voltage | V _{CC} | -0.5 | 4.0 | V |
| Input Voltage | V _{IN} | -0.5 | V _{CC} | V |
| Output Current | I _O | - | 50 | mA |
| Operating Current | I _{OP} | - | 400 | mA |

RECOMMENDED OPERATING CONDITIONS

| PARAMETER | SYMBOL | MIN | MAX | UNIT | NOTES |
|----------------------------|-----------------------------------|-----|-----|------|--------------------|
| Case Operating Temperature | T _C | 0 | 70 | °C | CS15D-24F-3S-TC-LD |
| | | -40 | 85 | | CS15D-24F-3S-TI-LD |
| Supply Voltage | V _{CC} | 3.1 | 3.5 | V | |
| Supply Current | I _{TX} + I _{RX} | - | 300 | mA | |

Lasermate Group, Inc.

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: <http://www.lasermate.com>

**TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS ($V_{CC} = 3.1V$ to $3.5V$, $T_C = 0^{\circ}C$ to $70^{\circ}C$, $-40^{\circ}C$ to $85^{\circ}C$)**


| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTES |
|---------------------------------------|---------------------------|------|------|------|-------|---------|
| Output Optical Power 9/125um fiber | P_{out} | -9 | - | -3 | dBm | Average |
| Extinction Ratio | ER | 9 | - | - | dB | |
| Center Wavelength | λ_C | 1530 | 1550 | 1570 | nm | |
| Spectral Width (-20dB) | $\Delta\lambda$ | - | - | 1 | nm | |
| Relative Intensity Noise | RIN | - | - | -120 | dB/Hz | |
| Rise/Fall Time (20~80%) | $T_{r,f}$ | - | - | 260 | ps | |
| Side Mode Suppression Ratio | SMSR | 30 | - | - | dB | |
| Total Jitter | TJ | - | - | 227 | ps | |
| Output Eye | Compliant with IEEE802.3z | | | | | |
| Max. P_{out} TX-DISABLE Asserted | P_{OFF} | - | - | -45 | dBm | |
| Differential Input Voltage | V_{DIFF} | 0.4 | - | 2.0 | V | |

RECEIVER ELECTRO-OPTICAL CHARACTERISTICS ($V_{CC} = 3.1V$ to $3.5V$, $T_C = 0^{\circ}C$ to $70^{\circ}C$, $-40^{\circ}C$ to $85^{\circ}C$)

| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTES |
|---|---------------------|------|------|----------|------|-----------------------|
| Optical Input Power-Maximum | P_{IN} | -1 | - | - | dBm | BER<10 ⁻¹² |
| Optical Input Power-Minimum (Sensitivity) | P_{IN} | - | -26 | -21 | dBm | BER<10 ⁻¹² |
| Operating Center Wavelength | λ_C | 1260 | - | 1610 | nm | |
| Optical Return Loss | ORL | 12 | - | - | dB | |
| Signal Detect-Asserted | P_A | - | - | -21 | dBm | |
| Signal Detect-Deasserted | P_D | -35 | - | - | dBm | |
| Data Output Rise, Fall time (20~80%) | $T_{r,f}$ | - | - | 0.35 | ns | |
| Differential Output Voltage | V_{DIFF} | 0.5 | - | 1.2 | V | |
| Receiver Loss of Signal Output Voltage-Low | RX_LOS _L | 0 | - | 0.5 | V | |
| Receiver Loss of Signal Output Voltage-High | RX_LOS _H | 2.4 | - | V_{CC} | V | |



BLOCK DIAGRAM OF TRANSCEIVER

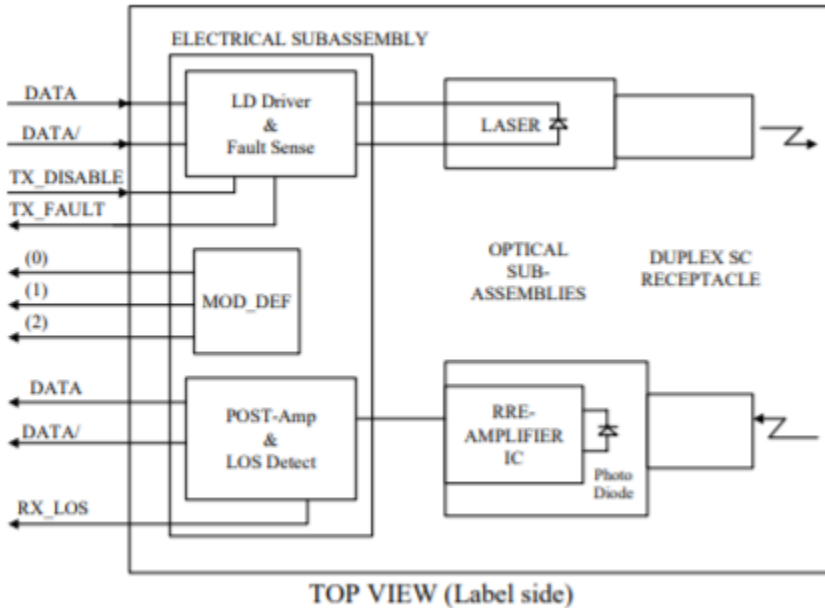


Transmitter Section - The transmitter section consists of a 1550 nm InGaAsP laser in an eye safe optical subassembly (OSA) which mates to the fiber cable. The laser OSA is driven by a LD driver IC which converts differential input LVPECL logic signals into an analog laser driving current.

TX_DISABLE - The TX_DISABLE signal is high (TTL logic "1") to turn off the laser output. The laser will turn on when TX_DISABLE is low (TTL logic "0").

Receiver Section - The receiver utilizes an InGaAs PIN photodiode mounted together with a trans-impedance preamplifier IC in an OSA. This OSA is connected to a circuit providing post-amplification quantization, and optical signal detection.

Receive Loss (RX_LOS) - The RX_LOS is high (logic "1") when there is no incoming light from the companion transceiver. This signal is normally used by the system for the diagnostic purpose. The signal is operated in LVTTTL level.

DIMENSIONS

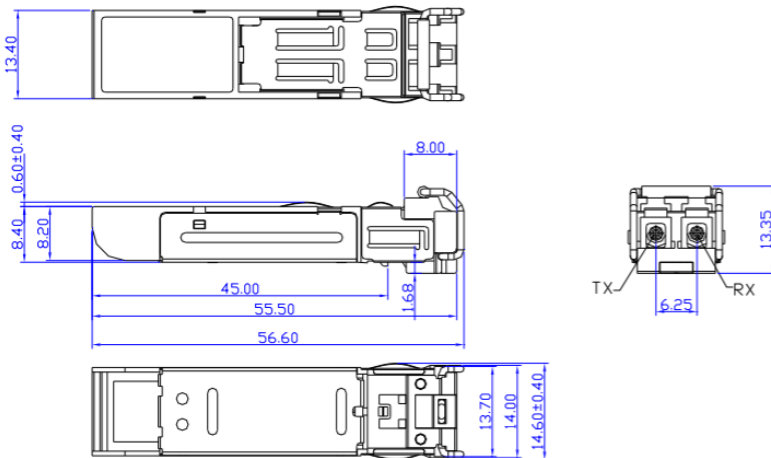

DIMENSIONS ARE IN MILLIMETERS

ALL DIMENSIONS ARE ± 0.2mm UNLESS OTHERWISE SPECIFIED



Lasermate Group, Inc.

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: <http://www.lasermate.com>



SFP HOST BOARD MECHANICAL LAYOUT

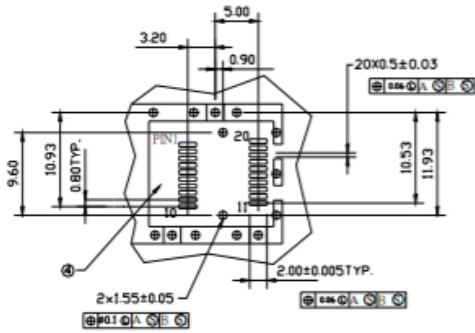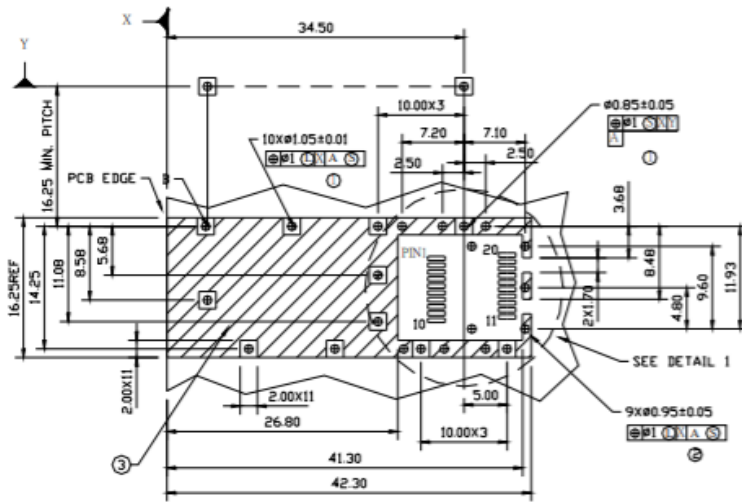

LEGEND

1. PADS AND VIAS ARE CHASSIS GROUND
2. THROUGH HOLES, PLATING OPTIONAL
3. HATCHED AREA DENOTES COMPONENT AND TRACE KEEPOUT (EXCEPT CHASSIS GROUND)
4. AREA DENOTES COMPONENT KEEPOUT (TRACES ALLOWED)

DIMENSIONS ARE IN MILLIMETERS

ASSEMBLY DRAWING (unit: mm)



Lasermate Group, Inc.

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: <http://www.lasermate.com>



PIN ASSIGNMENT



| PIN | SIGNAL NAME | DESCRIPTION | PIN | SIGNAL NAME | DESCRIPTION |
|-----|------------------|---|-----|------------------|--|
| 1 | T _{GND} | Transmit Ground | 11 | R _{GND} | Receiver Ground |
| 2 | TX_FAULT | Transmit Fault | 12 | RX- | Receive Data Bar, Differential PECL, ac coupled |
| 3 | TX_DISABLE | Transmit Disable | 13 | RX+ | Receive Data, Differential PECL, ac coupled |
| 4 | MOD_DEF (2) | SDA Serial Data Signal | 14 | R _{GND} | Receiver Ground |
| 5 | MOD_DEF (1) | SCL Serial Clock Signal | 15 | V _{CCR} | Receiver Power Supply |
| 6 | MOD_DEF (0) | TTL Low | 16 | V _{CCT} | Transmitter Power Supply |
| 7 | RATE_SELECT | Open Circuit | 17 | T _{GND} | Transmitter Ground |
| 8 | RX_LOS | Receiver Loss of Signal, TTL High, open collector | 18 | TX+ | Transmit Data, Differential PECL, ac coupled |
| 9 | R _{GND} | Receiver Ground | 19 | TX- | Transmit Data Bar, Differential PECL, ac coupled |
| 10 | R _{GND} | Receiver Ground | 20 | T _{GND} | Transmitter Ground |

EYE SAFETY MARK

The single-mode transceiver is a class 1 laser product. It complies with EN 60825-1 and FDA 21 CFR 1040.10 and 1040.11. In order to meet laser safety requirements, the transceiver shall be operated within the Absolute Maximum Ratings.

Required Mark

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**

[Caution] All adjustments have been done at the factory before the shipment of the devices. No maintenance and user serviceable part is required. Tampering with and modifying the performance of the device will result in voided product warranty.

ORDERING INFORMATION

| PART NUMBER | OPERATING TEMPERATURE |
|--------------------|-----------------------|
| CS15D-24F-3S-TC-LD | 0°C to 70°C |
| CS15D-24F-3S-TI-LD | -40°C to 85°C |

Note: The specifications subject to change without notice.

Lasermate Group, Inc.

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: <http://www.lasermate.com>