


## Lasermate Group, Inc.

## The Friend of Lasers



## 850nm 10W Multi-Channel Pulsed VCSEL Diode Array


Model No. VCAxA-850H10WA

### **Features**

- Package: 1x4 array, 1x8 array, 1x16 array
- Good thermal conduction
- Short rise time
- Oxide isolation technology
- · High reliability and Easy to collimate
- 10W 850nm VCSEL @ 73A, pulse width 7.2ns

## **Applications**

- · Proximity sensor
- Laser curtain
- 3D sensor
- Range finder sensor
- 3D detection
- · Scanning lidar



1x4





1x8 1x16

### **Specifications**

Absolute Maximum Ratings				
Parameters	Symbol	Rating	Unit	Conditions
Case Operating Temperature	Тор	-40 to 85	°C	
Storage Temperature	Tstg	-40 to 105	°C	
Reflow Soldering Temperature	Tsol	260	°C	10 seconds
Reverse Voltage	Vr	5	V	
Maximum Continuous Current	Imax	80	Α	Duty cycle 0.1% max
ESD Exposure (Human Body) Model	ESD	2K	V	

### Notes:

- Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.
  This is a stress rating only and functional operation of the device at these or other conditions above those indicated in the operations section for expanded periods of time may affect reliability.
- In its maximum rating diode laser operation could damage its performance or cause potential safety hazard such as equipment failure.
- Electrostatic discharge is the main reason for laser fault of the diode. Take effective precautions against ESD. When dealing with laser diodes, use wrist strap, grounding work surface and strict antistatic technology.


Electro-Optical Characteristics (Top=	:25°C, Pulse width	7.2ns at	11.68 kHz) (Sing	gle Die)		
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Optical Output Power	Po	-	10	-	W	I <sub>F</sub> =73A
Threshold Current	I <sub>th</sub>	-	0.05	-	Α	
Forward Pulse Current		-	73	-	Α	
Emission Area		-	215 x 226	-	um	
Peak Wavelength	λ <sub>P</sub>	840	850	860	nm	P <sub>o</sub> =10W
Pulse Forward Voltage	VF	-	30	-	V	I <sub>F</sub> =73A
Series Resistance	Rs	-	0.41	-	Ohm	I <sub>F</sub> =73A
Beam Angle	θ	-	20	-	Deg	I <sub>F</sub> =73A
Wavelength Temperature Drift	Δλρ/ ΔΤ	-	0.07	-	nm/°C	I <sub>F</sub> =73A
Rise Time	Tr	-	2.4	-	ns	
Soldering Temperature	Tsol			260	°C	10 seconds
Duty Cycle		-	-	0.1	%	
Substrate		AIN				

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: http://www.lasermate.com



# Lasermate Group, Inc.


## The Friend of Lasers



Environmental Specifications						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Case Operating Temperature	Тор	-40	20	85	°C	
Storage Temperature	Tstg	-40	20	105	°C	

## **Typical Characteristics**


#### LIV Graph

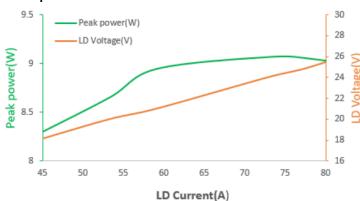

Pulse width=6.2ns




Intensity vs. Wavelength




## **Outline Dimensions (unit: mm)**

#### 1x4 Array

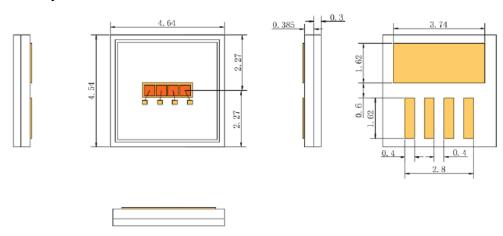


1x8 Array

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: http://www.lasermate.com

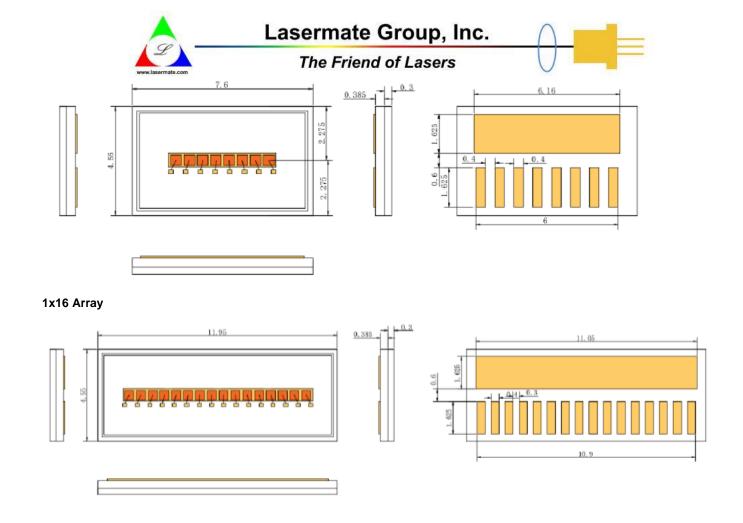

## **SMT Reflow Soldering Curve**

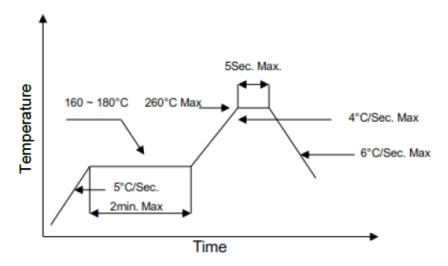

Note: Reflow soldering can be operated only one time. During the temperature ramp-up, no forces may be exerted on the LD which would deform or damage them. After soldering is completed, please do not process until the product temperature ramps down to room temperature.



## Lasermate Group, Inc.

## The Friend of Lasers



### **Ordering Information**

Part Number	Package	
VCA4A-850H10WA	1x4 4ch Array	
VCA8A-850H10WA	1x8 8ch Array	
VCA16A-850H10WA	1x16 16ch Array	

#### **Additional Notes**

- 1. Please use solder paste to cure the laser diode.
- 2. Please make sure that the heat of VCSEL diode has been completely conducted to metal shell to avoid affecting the optical power output.
- 3. This VCSEL diode can be only used in constant voltage and current.
- 4. Please do not aim the laser at people or animals.
- 5. You may observe the laser spot through an image monitoring equipment.
- 6. Please do not touch VCSEL diode surface by naked hands or squeeze the sealant on VCSEL diode surface. It may cause wrong optical angle and distorted laser spot, and even damage the VCSEL diode.
- 7. Please use ceramic suction nozzle to absorb the VCSEL diode, so as to avoid VCSEL diode sticking to the nozzle.
- 8. Please add a 0.02s blowing action after locating the laser diode to aluminum substrate.
- 9. Specifications are subject to change without notice.

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: http://www.lasermate.com