



**Model No. LDH1064C160WA**

**1064nm High Power CW Macrochannel Water-Cooled Horizontal Array**

The LDH-series high power packaged bars provide OEM customers with scalable power up to kilowatts for pumping, industrial and medical applications. The packaged laser bars can be configured for enhanced brightness through stacking, scaled linearly or vertically for optimized light and material integration.

**FEATURES**

- 1064nm Macrochannel Water-Cooled Horizontal Array
- CW Operation
- High output power: 160W
- Spectral width: <5 nm
- High reliability, High efficiency
- Modular and compact design for ease of integration
- Packaged 10mm laser diode bar



**SPECIFICATIONS (T<sub>c</sub> = 25°C)**

ITEM	PARAMETER	LDH1064C160WA	UNIT
<b>OPTICAL PARAMETER</b>	Center wavelength	1064	nm
	Operation mode	CW	-
	Output power	160	W
	Output power/bar	40	W
	Spectral width	<5	nm
	Bar quantity	4	-
	Wavelength Temperature coefficient	0.28	nm/°C
	Fast axis divergence	<39	deg
	Slow axis divergence	<10	deg
<b>ELECTRICAL PARAMETER</b>	Threshold current	<7	A
	Operating current	<50	A
	Operating voltage/Bar	<2.0	V
<b>THERMAL PARAMETER</b>	Operating temperature	15 to 35	°C
	Storage temperature	-10 to +60	°C


**Notes:**

1. The above specifications are subject to change without notice.
2. Please make sure that the laser diode is operated under the temperature between 15 °C and 35 °C, as high temperature will increase threshold current, decrease exchange rate and accelerate the aging.
3. Please take measures to avoid condensation, which will cause aging of laser diode.





MECHANICAL OUTLINE (unit: mm)

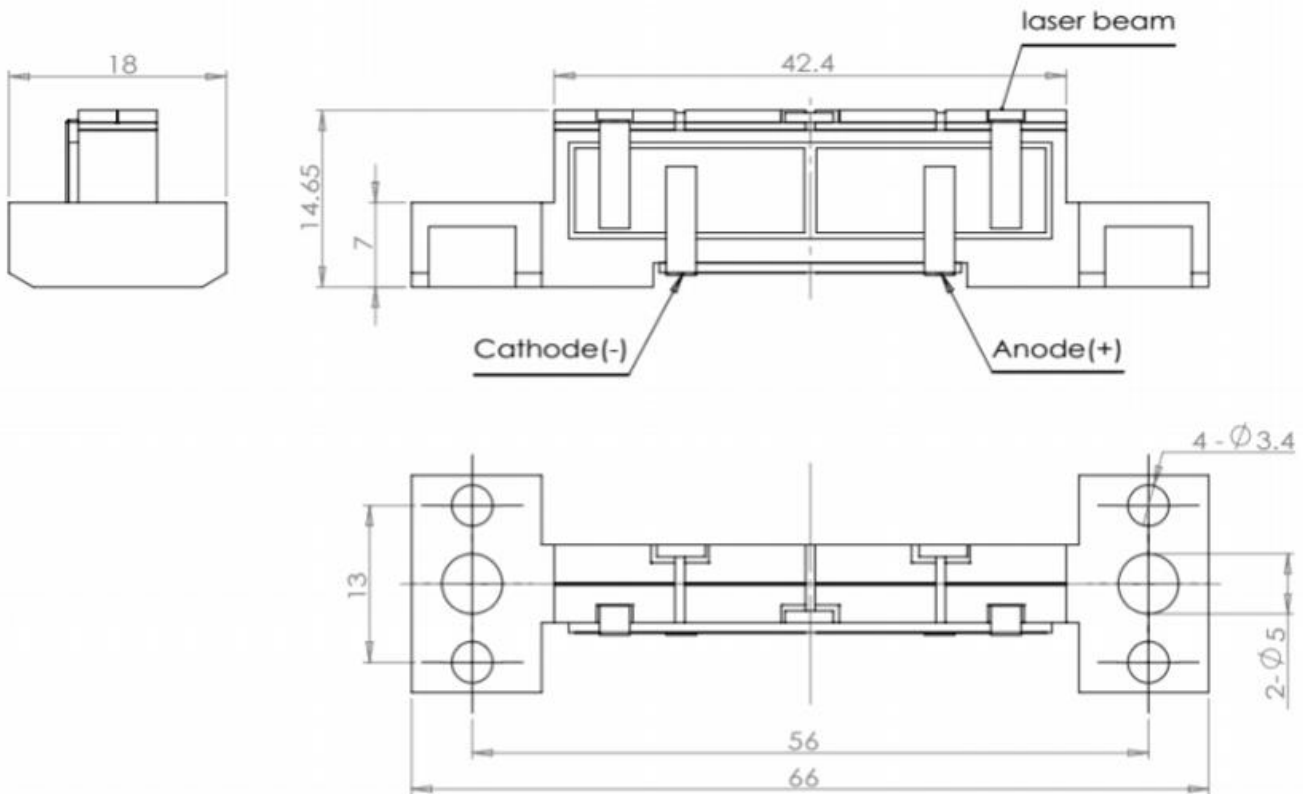

Notes:

4. The above specifications are subject to change without notice.
5. Please make sure that the laser diode is operated under the temperature between 15 °C and 35 °C, as high temperature will increase threshold current, decrease exchange rate and accelerate the aging.
6. Please take measures to avoid condensation, which will cause aging of laser diode.

