



**Model No. LDV808C200WI**

**808nm High Power CW Microchannel Water-Cooled Vertical Array**

The LDV-series high power packaged bars provide OEM customers with scalable power up to kilowatts for pumping, industrial and medical applications. The packaged laser bars can be configured for enhanced brightness through stacking, scaled linearly or vertically for optimized light and material integration.

**FEATURES**

- 808nm Microchannel Water-Cooled Vertical Array
- CW Operation
- High output power: 200W
- Spectral width: <5 nm
- High reliability, High efficiency
- Modular and compact design for ease of integration
- Packaged 10mm laser diode bar




**SPECIFICATIONS (T<sub>c</sub> = 25°C)**

ITEM	PARAMETER	LDV808C200WI	UNIT
<b>OPTICAL PARAMETER</b>	Center wavelength	808	nm
	Operation mode	CW	-
	Output power	200	W
	Output power/bar	40	W
	Spectral width	<5	nm
	Bar quantity	5	-
	Bar space	1.8	mm
	Fast axis divergence	<39	deg
	Slow axis divergence	<10	deg
<b>ELECTRICAL PARAMETER</b>	Threshold current	<7	A
	Operating current	<40	A
	Operating voltage/Bar	<2.0	V
<b>THERMAL PARAMETER</b>	Max. inlet pressure	65	psi
	Cooling rate/bar	≥0.3	1/min
	Cooling medium particle size	≤15	µm
	Cooling medium conductivity	5 to 10	µs/cm
	Operating temperature	15 to 35	°C
	Storage temperature	-10 to +60	°C





MECHANICAL OUTLINE (unit: mm)

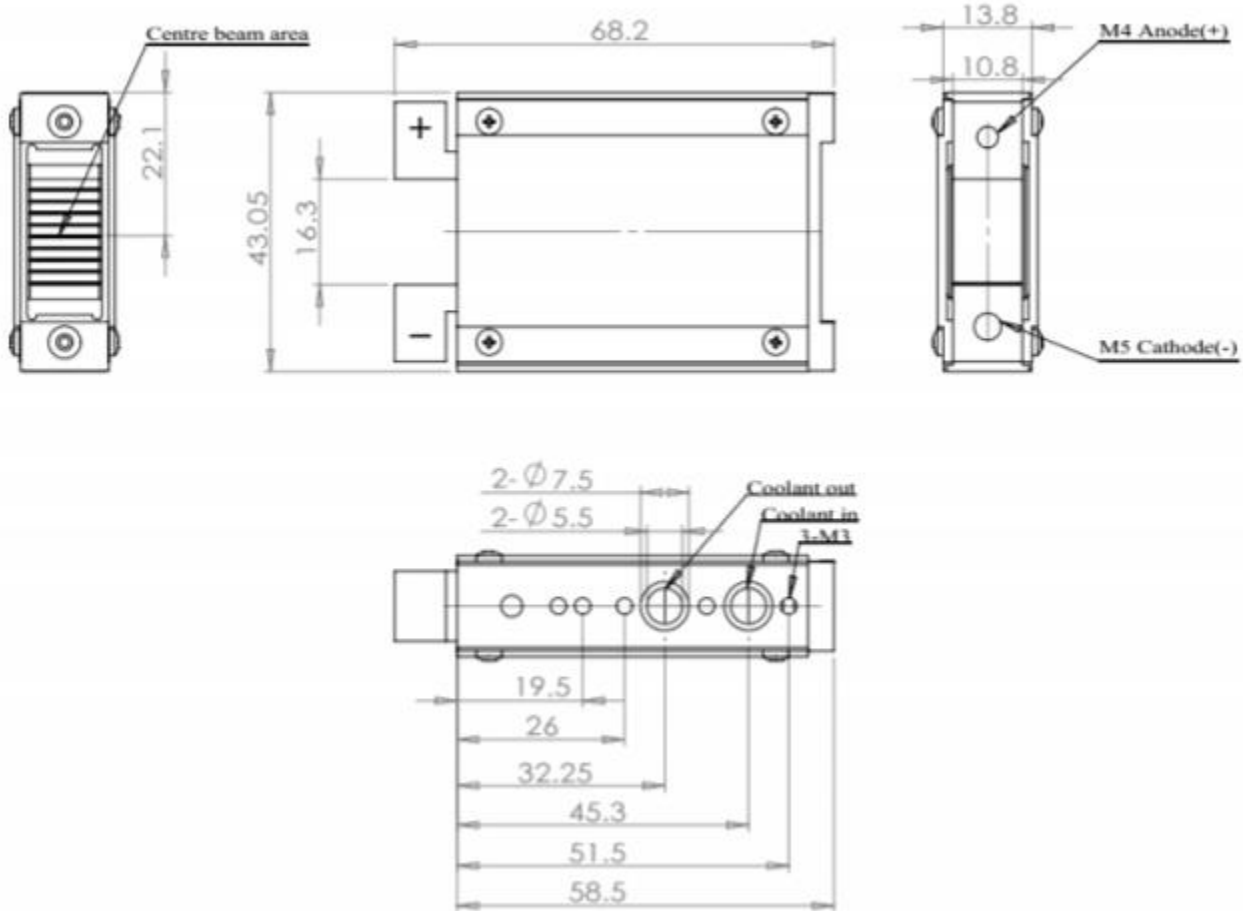

Notes:

1. The above specifications are subject to change without notice.
2. Please make sure that the laser diode is operated under the temperature between 15 °C and 35 °C, as high temperature will increase threshold current, decrease exchange rate and accelerate the aging.
3. Please take measures to avoid condensation, which will cause aging of laser diode.

