



## DLSD635 Series 635nm Diode Laser System up to 1000mW

### Overview

The DLSD635 series diode laser is ideal for applications that require a wavelength of 635nm and output power levels up to 1000mW. The laser features a compact design, long operating lifetime, easy operation, and FDA-compliant system with driver. The laser is widely used in measurement, spectrum analysis, laser lighting show, and many other applications.



### Specifications


<b>Model Number</b>	<b>DLSD635-XYPQ</b>	
Wavelength (nm)	635±5	
Output power (mW)	>600 ( <b>X=600</b> ), >1000 ( <b>X=1W</b> )	
Transverse mode	Near TEM <sub>00</sub>	
Operating mode	CW	
Power stability (rms, over 4 hours)	<1% ( <b>P=D</b> )	
Polarization direction	Horizontal + Vertical	
Beam diameter at aperture (1/e <sup>2</sup> , mm)	5.0x3.8	
Beam divergence, full angle (mrad)	<1.6x0.2	
Warm-up time (minutes)	<5	
Operating temperature (°C)	10-35	
Dimensions of laser head (mm)	131.2(L)x99(W) x91(H) mm <sup>3</sup>	
Weight of laser head (kg)	1.6 kg	
Power supply options		
Elite Power Supply ( <b>Y=E</b> )	Input voltage	85-264VAC
	Dimensions	171(L) x130(W) x62.2(H) mm <sup>3</sup>
	Weight	1.2 kg
	Notes	Fixed output power
Laboratory Power Supply ( <b>Y=L</b> )	Input voltage	85-264VAC
	Dimensions	188.6(L) x155(W) x92(H) mm <sup>3</sup>
	Weight	1.5 kg
	Notes	Adjustable output power
Modulation option		None ( <b>Q=0</b> )
	TTL	1Hz-1kHz ( <b>Q=T1</b> ), 1kHz-10kHz ( <b>Q=T2</b> ), 10kHz-30kHz ( <b>Q=T3</b> )
	Analog	1Hz-1kHz ( <b>Q=A1</b> ), 1kHz-10kHz ( <b>Q=A2</b> ), 10kHz-30kHz ( <b>Q=A3</b> )
Expected lifetime (hours)	10,000	
Warranty period	10 months	
FDA Compliance	FDA CDRH Title 21 CFR 1040.10/11 Class IV	

#### Remarks:

- Specifications of the CW laser is based on the laser performance at full power output after the specified warmup period. The stability of output power may change when output power is adjusted at a different power level.



**Outline Dimensions (unit: mm)**

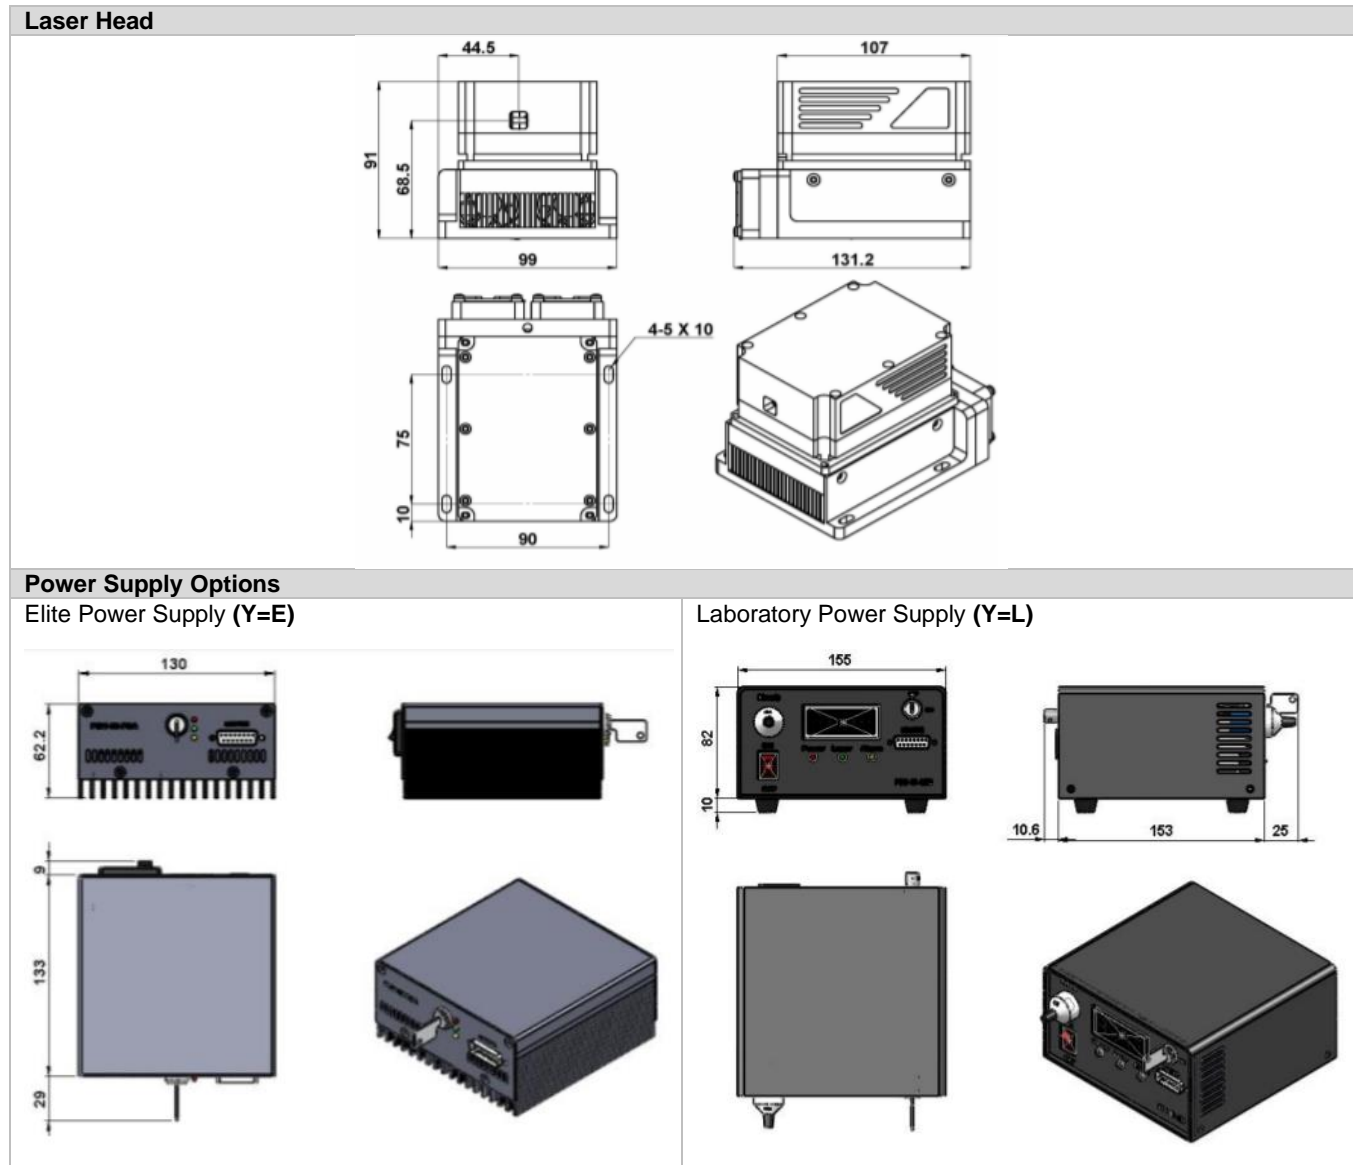

Note: The above specifications are subject to change without notice.