


Lasermate Group, Inc.

The Friend of Lasers



DPF349 Series 349nm UV CW DPSS Laser System up to 30mW

Overview

The DPF349 series diode pumped solid state (DPSS) laser is ideal for applications that require a wavelength of 349nm and output power levels up to 30mW. The laser is constructed with features of FDA compliance, ultracompactness, long lifetime, easy operating, and cost-effectiveness. This laser consists of the laser head and AC power supply with complete FDA compliant features. The laser is widely used in DNA sequencing, flow cytometry, optical instrument, spectrum analysis, measurement, cell sorting, physics experiment, laser rapid modeling, and many other applications.



Specifications

Model Number		DPF349-XYZ
Wavelength (nm)		349±1
Output power (mW)		>3 (X=3), >5 (X=5), >10 (X=10), >15 (X=15), >20 (X=20), >25 (X=25), >30 (X=30)
Transverse mode		Near TEM ₀₀
Operating mode		CW
Power stability (rms, over 4 hours)		<10% (Z=B)
Beam diameter at aperture (mm)		~1.5
Beam divergence, full angle (mrad)		<1.0
M ² factor		<2.0
Polarization ratio		>50:1, Horizontal ±5 degree
Warm-up time (minutes)		<10
Beam height from base plate (mm)		45
Spectral purity		>99%
Operating temperature (°C)		10~35
Dimensions of laser head (mm)		211(L)×88(W) ×74(H) mm ³
Weight of laser head (kg)		1.6 kg
Power supply		
High Power Elite Power Supply (Y=H)	Input voltage	90-264VAC
	Dimensions	236(L) ×145(W) ×104(H) mm ³
	Weight	2.3 kg
	Notes	CW mode with complete FDA compliant features, such as the turnkey switch and
		interlock, and easy to operate
Expected lifetime (hours)		5,000
Warranty period		10 months
FDA Compliance		FDA CDRH Title 21 CFR 1040.10/11 Class IIIb

Remarks:


• Specifications of the CW laser is based on the laser performance at full power output after the specified warmup period. The stability of output power may change when output power is adjusted at a different power level.

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: http://www.lasermate.com




Lasermate Group, Inc.

The Friend of Lasers



Outline Dimensions (unit: mm)

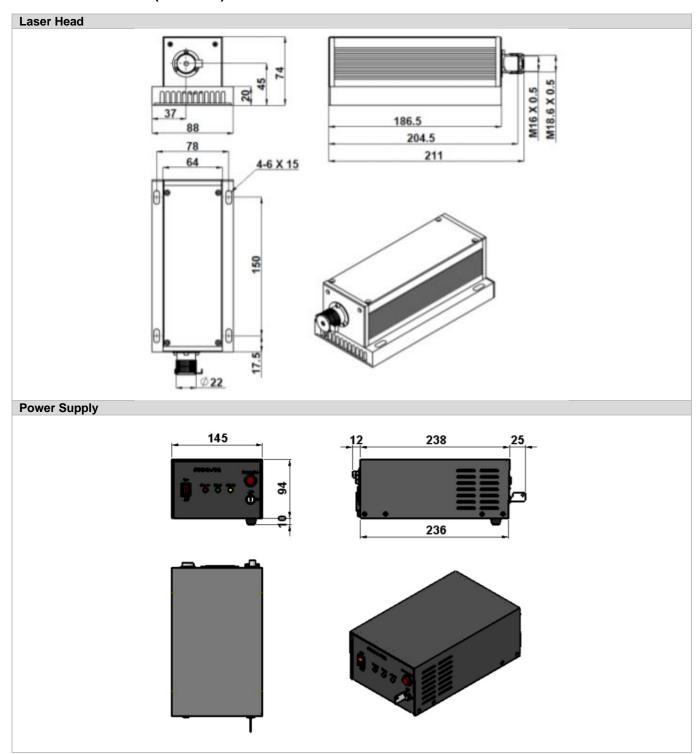

Note: The above specifications are subject to change without notice.

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: info@lasermate.com | URL: http://www.lasermate.com