

FCL1208 Series 1208nm High Power Fiber Coupled Diode Laser System up to 12W

Overview

The FCL1208 series fiber coupled diode laser is ideal for applications that require a wavelength of 1208nm and output power levels up to 12W. The laser features an integrated laser diode, fiber coupling optics, laser power supply, LD current and temperature control in one box. Its compact dimensions and convenient functions, including but not limited to power adjustment, temperature control, and LED display make the laser suitable for pumping, scientific research, industrial and medical applications.



Specifications

Model Number	FCL1208-XPQZ-A	
Wavelength (nm)	1208±20	
Operating mode	CW	
Output power after fiber (W)	~12 (X=12W)	
Power stability (rms, over 4 hours)	<1% (P=D)	
Fiber core diameter	400um	
Fiber numerical aperture	0.22 NA	
Fiber connector	SMA905	
Fiber length (m)	2	
LED display	Diode current	
LD temperature control range (°C)	15-30, adjustable by knob	
Output power control	0-100%, adjustable by knob	
Operating temperature	10-40°C	
Red pilot light option	No (Z=N), Yes (Z=R)	
Dimensions of laser (mm)	406(L)×370(W) ×186(H)	
Weight of laser (kg)	<15 kg	
Power consumption (KVA)	<0.5	
Input power	90-264VAC, 50 to 60Hz	
Cooling method	Air cooled	
Modulation option	None (Q=0)	
	TTL	1Hz-1kHz (Q=T1)
	Analog	1Hz-1kHz (Q=A1)
Optional accessories	Fiber Collimator	
Expected lifetime (hours)	10,000	
Warranty period	10 months	


Remarks:

- The laser can be run from 0-30kHz. However, the laser will be adjusted such that the waveform and performance is good at the requested specified range.
- Specifications of the CW laser is based on the laser performance at full power output after the specified warmup period. The stability of output power may change when output power is adjusted at a different power level.



Outline Dimensions (unit: mm)

Laser

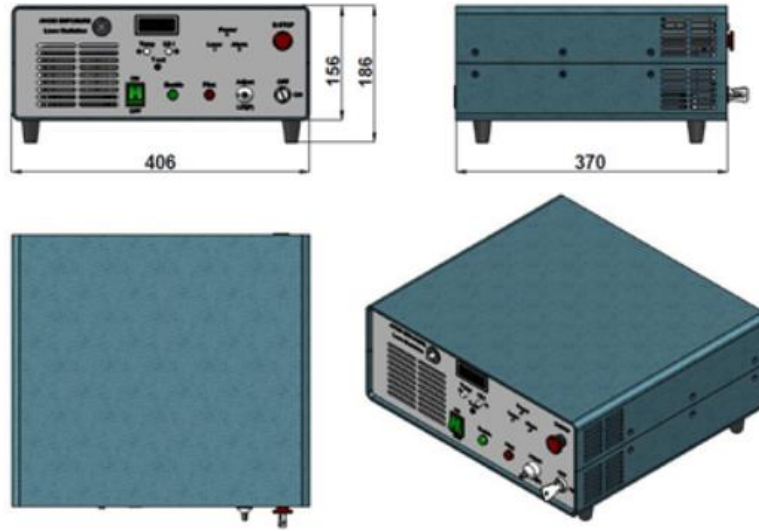

Note: The above specifications are subject to change without notice.