



## FCL639 Series 639nm High Power Fiber Coupled Diode Laser System up to 7000mW

### Overview

The FCL639 series fiber coupled diode laser is ideal for applications that require a wavelength of 639nm and output power levels up to 7000mW. The laser features an integrated laser diode, fiber coupling optics, laser power supply, LD current and temperature control in one box. Its compact dimensions and convenient functions, including but not limited to power adjustment, temperature control, and LED display make the laser suitable for pumping, scientific research, industrial and medical applications.



### Specifications


<b>Model Number</b>	<b>FCL639-XPQ-A</b>	
Wavelength (nm)	639±4	
Operating mode	CW	
Output power after fiber (W)	~3 ( <b>X=3W</b> ), ~5 ( <b>X=5W</b> ), ~7 ( <b>X=7W</b> )	
Power stability (rms, over 4 hours)	<5% ( <b>P=A</b> )	
Fiber core diameter	400um	
Fiber numerical aperture	0.22 NA	
Fiber connector	SMA905	
Fiber length (m)	2	
Output power control	0-100%, adjustable by knob	
Display	Diode current	
LD temperature control range (°C)	15-30, for diode laser only	
Operating temperature	10-35°C	
Dimensions of laser (mm)	291(L)×330(W) ×156(H)	
Input power voltage	100-240VAC, 50 to 60Hz	
Cooling method	Air cooled	
Modulation option	None ( <b>Q=0</b> )	
	TTL	1Hz-1kHz ( <b>Q=T1</b> )
	Analog	1Hz-1kHz ( <b>Q=A1</b> )
Optional accessories	<a href="#">Fiber Collimator</a>	
Expected lifetime (hours)	10,000	
Warranty period	10 months	

#### Remarks:

- Specifications of the CW laser is based on the laser performance at full power output after the specified warmup period. The stability of output power may change when output power is adjusted at a different power level.



**Outline Dimensions (unit: mm)**

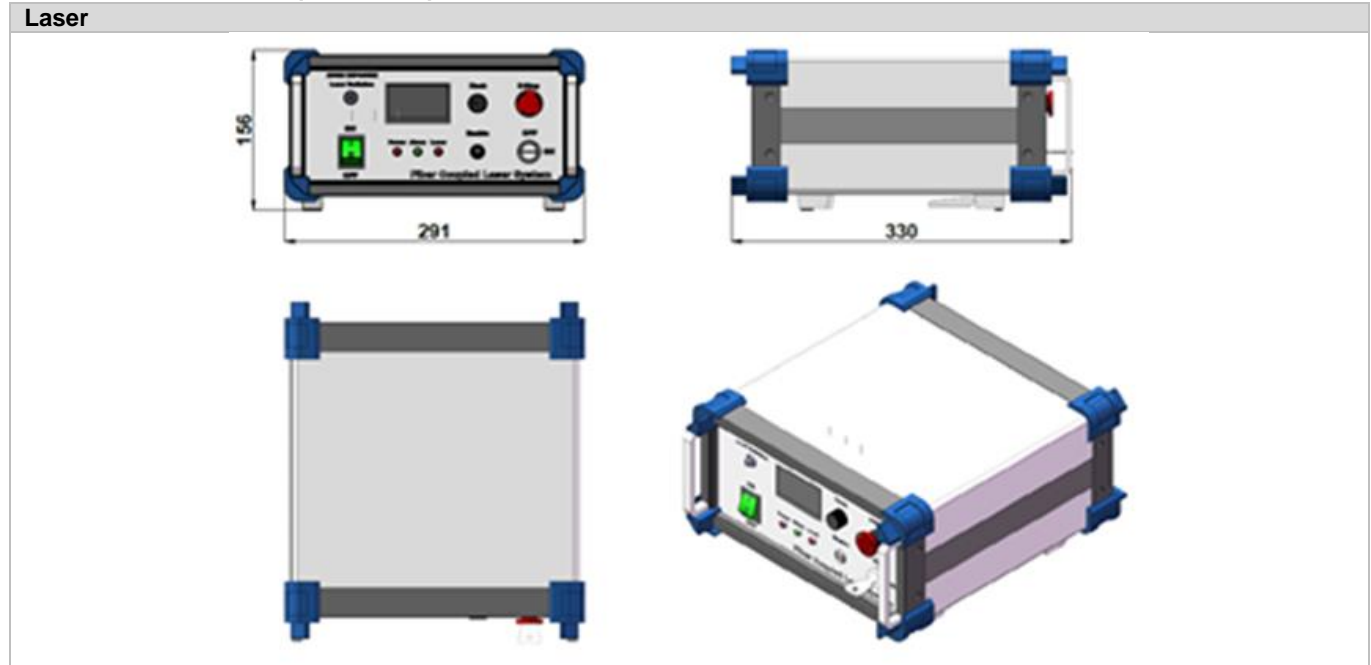

Note: The above specifications are subject to change without notice.