



## FCL792 Series 792nm High Power Fiber Coupled Diode Laser System up to 100W

### Overview

The FCL792 series fiber coupled diode laser is ideal for applications that require a wavelength of 792nm and output power levels up to 100W. The laser features an integrated laser diode, fiber coupling optics, laser power supply, LD current and temperature control in one box. Its compact dimensions and convenient functions, including but not limited to power adjustment, temperature control, and LED display make the laser suitable for pumping, scientific research, industrial and medical applications.



### Specifications

<b>Model Number</b>	<b>FCL792-XPQZ-AV</b>	
Wavelength (nm)	792±3	
Operating mode	CW	
Output power after fiber (W)	~60 ( <b>X=60W</b> ), ~100 ( <b>X=100W</b> )	
Power stability (rms, over 4 hours)	<1% ( <b>P=D</b> )	
Fiber core diameter	400um	
Fiber numerical aperture	0.22 NA	
Fiber connector	SMA905	
Fiber length (m)	2	
Output power control	0-100%, adjustable by knob	
LED display	Diode current, temperature, frequency and pulse	
Temperature control range (°C)	18-45, adjustable by knob	
Temperature stability (°C)	±0.1	
Operating temperature	10-30°C	
Red pilot light option	No ( <b>Z=N</b> ), Yes ( <b>Z=R</b> )	
Dimensions of laser (mm)	406(L)×370(W) ×186(H)	
Weight of laser (kg)	<15	
Input power	110VAC ( <b>V=1</b> ), 200-240VAC ( <b>V=2</b> )	
Power consumption (KVA)	<0.5	
Cooling method	Air cooled	
Modulation option		None ( <b>Q=0</b> )
	TTL	1Hz-1kHz ( <b>Q=T1</b> ), 1kHz-10kHz ( <b>Q=T2</b> ), 10kHz-30kHz ( <b>Q=T3</b> )
	Analog	1Hz-1kHz ( <b>Q=A1</b> ), 1kHz-10kHz ( <b>Q=A2</b> ), 10kHz-30kHz ( <b>Q=A3</b> )
Optional accessories	<a href="#">Fiber Collimator</a>	
Expected lifetime (hours)	10,000	
Warranty period	10 months	


#### Remarks:

- The laser can be run from 0-30kHz. However, the laser will be adjusted such that the waveform and performance is good at the requested specified range.
- Specifications of the CW laser is based on the laser performance at full power output after the specified warmup period. The stability of output power may change when output power is adjusted at a different power level.



**Outline Dimensions (unit: mm)**

**Laser**

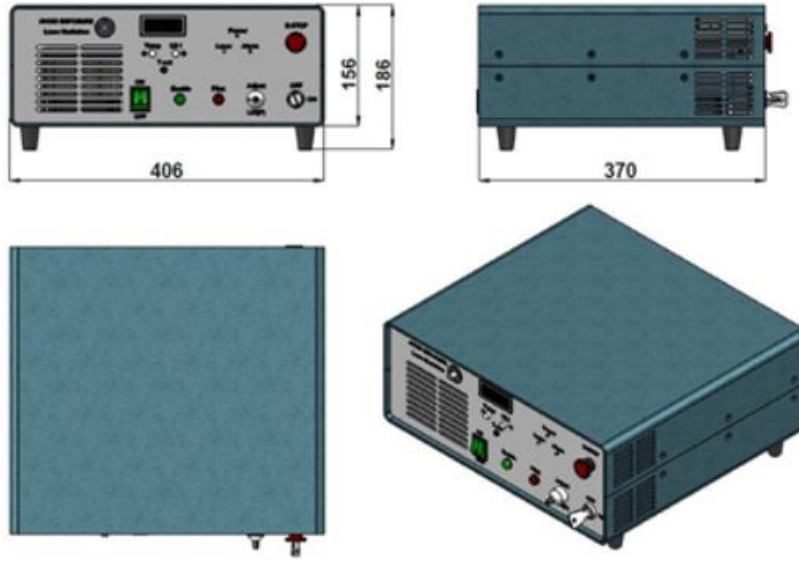

Note: The above specifications are subject to change without notice.