


## GD1651 Series 1651nm Diode Laser System up to 10mW (TEM<sub>00</sub>)

### Overview

The GD1651 series diode laser is ideal for applications that require a wavelength of 1651nm and output power levels up to 10mW. The laser features TEM<sub>00</sub> mode, narrow linewidth, no jump mode output in operating current range, compact design, long operating lifetime, easy operation and FDA-compliant system with driver. The laser is widely used in optical fiber gas detection system, optical sensing, fiber communications, measurement, communication, spectrum analysis, and many other applications.

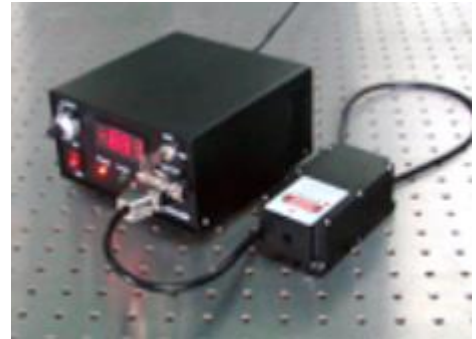

### Specifications

|   |   |  |
|---|---|--|
| <b>Model Number</b>                               | <b>GD1651-XYPQ</b>                          |  |
| Wavelength (nm)                                   | 1651±2                                      |  |
| Output power (mW)                                 | >5 (X=5), >10 (X=10)                        |  |
| Transverse mode                                   | TEM <sub>00</sub>                           |  |
| Operating mode                                    | CW  |  |
| Power stability (rms, over 4 hours)               | <5% (P=A), <3% (P=E), <2% (P=2)             |  |
| Ellipticity                                       | >0.95                                       |  |
| M <sup>2</sup> factor                             | <1.1  |  |
| Spectral linewidth (MHz)                          | ~3  |  |
| Beam diameter at aperture (1/e <sup>2</sup> , mm) | ~1.0  |  |
| Beam divergence, full angle (mrad)                | <1.5  |  |
| SMSR (dB)   | 35  |  |
| Warm-up time (minutes)                            | <5  |  |
| Beam height from base plate (mm)                  | 25  |  |
| Operating temperature (°C)                        | 25+/-3                                      |  |
| Dimensions of laser head (mm)                     | 146(L)×58(W) ×45(H) mm <sup>3</sup>         |  |
| Weight of laser head (kg)                         | 0.7 kg                                      |  |
| Power supply                                      |   |  |
| Elite Power Supply (Y=E)                          | Input voltage                               | 85-264VAC  |
|   | Dimensions                                  | 171(L) ×130(W) ×62.2(H) mm <sup>3</sup>                |
|   | Weight                                      | 1.2 kg   |
|   | Notes                                       | Fixed output power                                     |
| Laboratory Power Supply (Y=L)                     | Input voltage                               | 85-264VAC  |
|   | Dimensions                                  | 188.6(L) ×155(W) ×92(H) mm <sup>3</sup>                |
|   | Weight                                      | 1.5 kg   |
|   | Notes                                       | Adjustable output power                                |
| Modulation option                                 |   | None (Q=0)   |
|   | TTL   | 1Hz-1kHz (Q=T1), 1kHz-10kHz (Q=T2), 10kHz-30kHz (Q=T3) |
|   | Analog                                      | 1Hz-1kHz (Q=A1), 1kHz-10kHz (Q=A2), 10kHz-30kHz (Q=A3) |
| Expected lifetime (hours)                         | 10,000                                      |  |
| Warranty period                                   | 10 months                                   |  |
| FDA Compliance                                    | FDA CDRH Title 21 CFR 1040.10/11 Class IIIb |  |


### Remarks:

- The laser head needs to be used on a heat sink with good heat dissipation.
- Specifications of the CW laser is based on the laser performance at full power output after the specified warmup period. The stability of output power may change when output power is adjusted at a different power level.




**Outline Dimensions (unit: mm)**

**Laser Head**

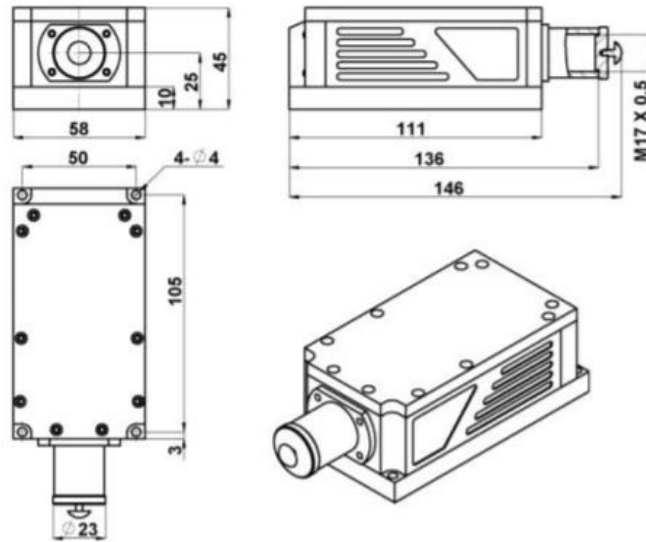


**Power Supply Options**

**Elite Power Supply (Y=E)**

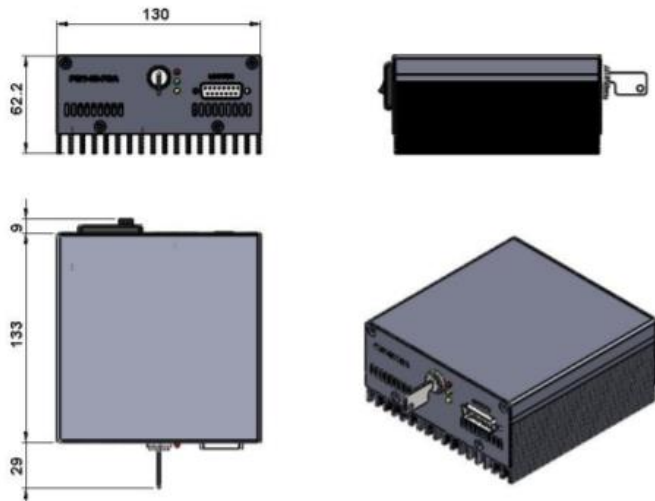

**Laboratory Power Supply (Y=L)**

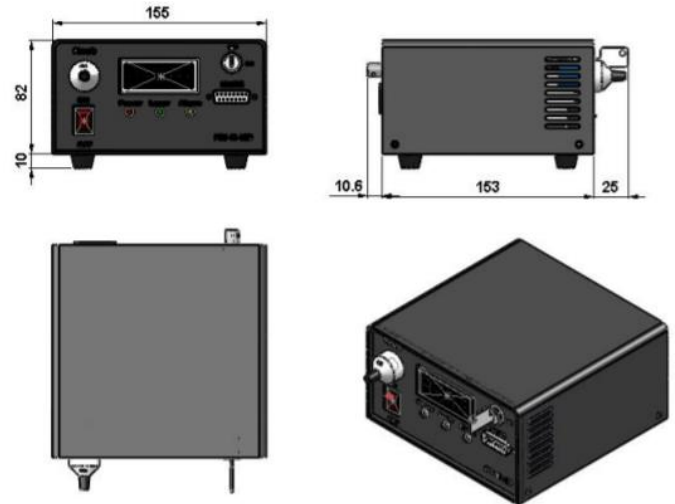

Note: The above specifications are subject to change without notice.