



## Model No. HYG Laser Safety Eyewear Product Specification

EN207 Pending. Visible Light Transmittance (VLT): 23% Grey

### CE Rating

Wavelength (nm)	L-Rating
1025-1075	DIRM LB5
1035-1070	DIRM LB6
1045-1065	D LB6 + IR LB7 + M LB7Y
1450-1650	DIR LB2
>1650-1775	DI LB3 + R LB3Y
>1775-3000	DI LB4 + R LB3Y
5200-11000	DI LB4 + R LB3Y




### Optical Density

Wavelength (nm)	OD
1025-1075	5+
1035-1070	6+
1045-1065	7+
1450-1650	2+
>1650-1775	3+
>1775-3000	4+
1980-2550	5+
5200-11000	5+
9000-10600	6+

### Applications

- Medical
- Scientific
- Dental
- Ultrafast

### Spectrophotometer Data

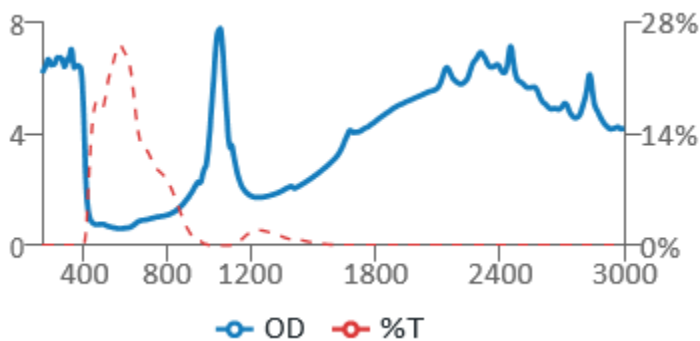

Note: The above specifications are subject to change without notice.



[Please see our website for all frame options.](#)

**Lasermate Group, Inc.**

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: [info@lasermate.com](mailto:info@lasermate.com) | URL: <https://www.lasermate.com>