

660nm 20mW 60°C Laser Diode in TO-18 ϕ 5.6mm Package

Part No. LD660A20C16

FEATURES

- 660nm 20mW AlGaInP Visible Laser Diode
- Low operating current
- High efficiency
- High precision package
- High power operation
- Package: TO-18 (dia. 5.6mm)

APPLICATIONS


- Laser pointers
- Industrial laser markers / measuring instruments
- High visibility applications

ABSOLUTE MAXIMUM RATINGS







Parameter	Symbol	Condition	Rating	Unit
Light output power	P_O	CW	22	mW
Reverse voltage (LD)	V_{RL}	-	2	V
Reverse voltage (PD)	V_{RD}	-	30	V
Forward current (PD)	I_{FD}	-	10	mA
Case temperature	T_C	-	-10 to +60	°C
Storage temperature	T_S	-	-40 to +85	°C


ELECTRICAL AND OPTICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	650	658	665	nm	$P_O = 20\text{mW}$
Threshold current	I_{th}	-	42	50	mA	
Operating current	I_{op}	-	70	80	mA	$P_O = 20\text{mW}$
Operating voltage	V_{op}	2.0	2.3	2.6	V	$P_O = 20\text{mW}$
Differential efficiency	η	0.5	0.8	1.2	mW/mA	$P_O = 15\text{-}20\text{mW}$
Monitor current	I_m	0.05	0.15	0.5	mA	$P_O = 20\text{mW}, V_{RD} = 0\text{V}$
Parallel divergence angle	$\theta_{//}$	6	8	10	deg	$P_O = 20\text{mW}$
Perpendicular divergence angle	θ_{\perp}	14	18	22	deg	
Parallel FFP deviation angle	$\Delta \theta_{//}$	-2	0	+2	deg	
Perpendicular FFP deviation angle	$\Delta \theta_{\perp}$	-2	0	+2	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	+80	um	




TYPICAL CHARACTERISTICS

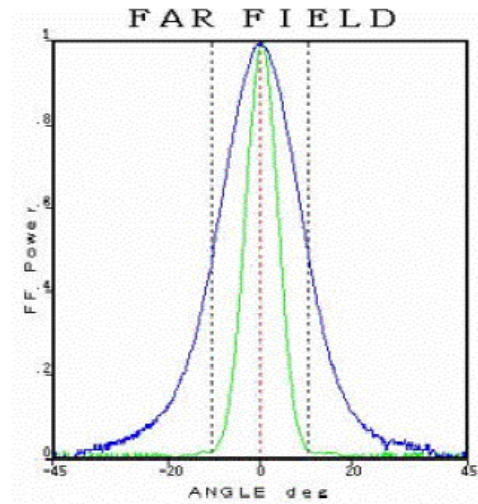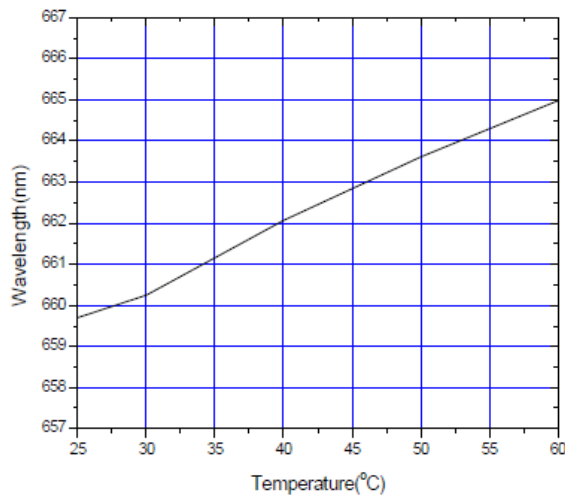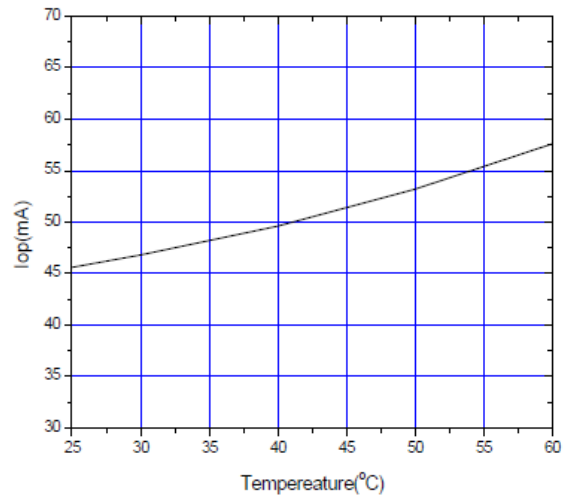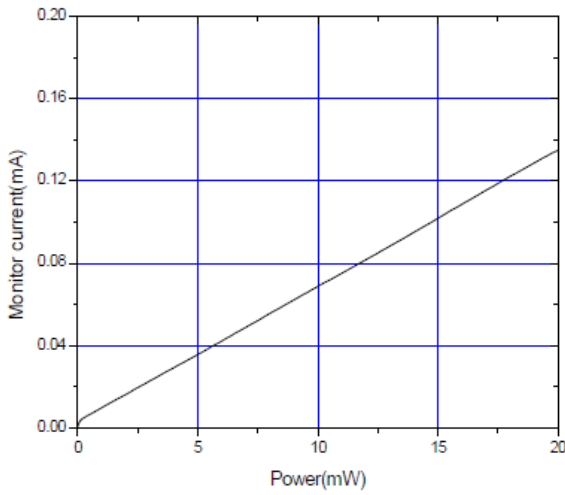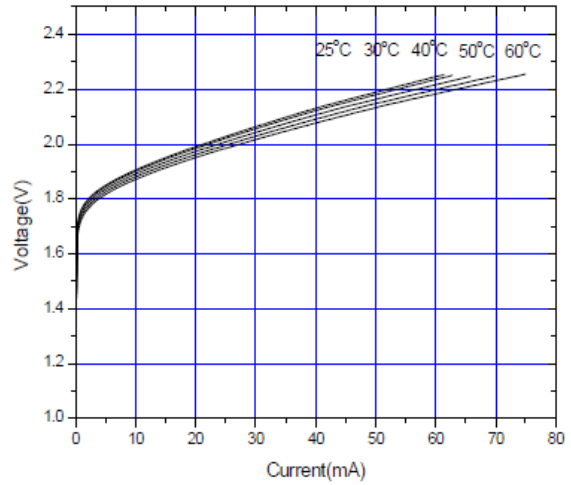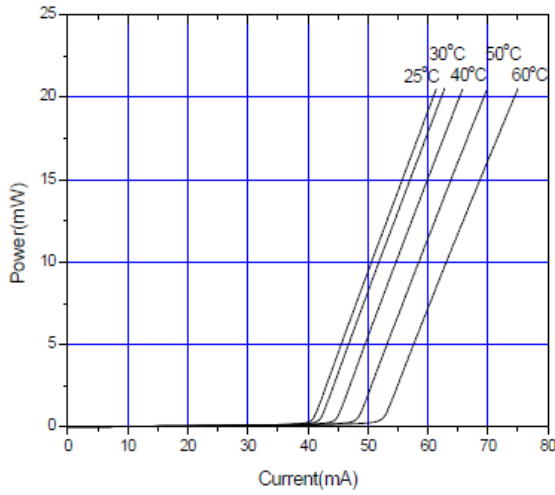




MECHANICAL OUTLINE (unit: mm)

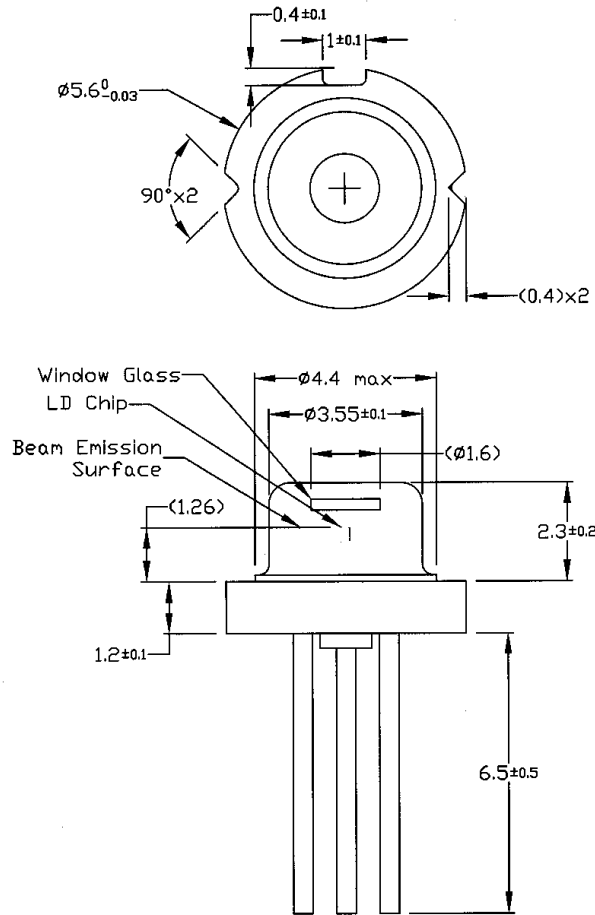

Pin Configuration



*Other pin configurations may be available upon request.

ADDITIONAL NOTES

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.