




## **LXG-X9 Series 635nm-980nm Cross Hair Generating Laser Diode Modules** With Super Fine Pitch for Precision Focusing and DC-Jack Connector

### **Overview**

The high performance LXG-X9 series laser diode modules with cross hair profile are self-contained laser diode modules designed for OEM applications with fine cross hair profile, adjustable output power and beam focusing requirements. The laser is designed as a high quality and high-performance laser diode module for industrial heavy-duty users. Designed for OEM, the laser is ideal for a wide range of low power laser applications, especially in continuous long-time usage, such as alignment and positioning.


### **Features**

- Wide range of wavelengths from 635nm to 980nm (including 650nm, 670nm, 780nm, 808nm, 850nm, 904nm)
- Wide range of output power up to 50mW
- High performance and low cost
- Adjustable optical output power and Automatic Power Control (APC)
- Adjustable focus
- Super fine pitch (0.25mm) for precision focusing
- Standard English dimension (Dia. 0.5 in x L. 2.0 in)
- 5V DC-Jack connector for regulated 5V AC Adapter
- Beam profile: "+" cross hair
- Beam thickness: <1mm @ 1m distance
- Beam length: ~15.7cm @ 1m distance
- Full fan angle: ~9 degrees

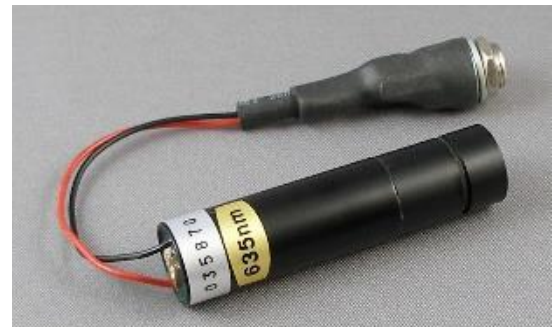

### **Specifications of LXG-X9 Series Laser Diode Modules with Cross Hair Lens**

Wavelength (nm)	635	650	670	780	808	850	904	980
Laser light	Visible Red				Infrared			
Laser class	Class II <1mW, Class IIIa <5mW, Class IIIb >5mW				Class IIIb			
Diode structure	Index guided							
Diode output power	5-50mW							
Operating current	30-90mA typical							
Operating voltage	4.5-6 VDC or 4.5-9V DC							
Drive circuit	Regulated APC with soft-start protection							
Collimating lens	Glass collimating lens with AR coating							
Beam divergence of cross hair lens	~9 degree							
Beam length @ 1 m	~15.7 cm							
Beam profile	Cross hair (dash lines)							
Focus	Adjustable							
Operating temperature	-10 to +40 °C or -10 to +50 °C							
Connector	5V DC-Jack connector							
Dimensions	Dia. 0.5" x L. 2"							
Weight	40 gm typical							



## Ordering Information

Part Number	Wavelength (nm)	Optical output power (mW)*	Laser class	Operating voltage (V DC)	Operating Current typical (mA)	Operating temperature (°C)
LXG6351AH-X9	635	0.5-0.99	II	4.5-9	40	-10 to +50
LXG6354AH-X9	635	2.5-3.5	IIIa	4.5-9	40	-10 to +50
LXG6357AH-X9	635	5-7	IIIb	4.5-9	60	-10 to +50
LXG6501AH-X9	650	0.5-0.99	II	4.5-9	30	-10 to +50
LXG6504AH-X9	650	2.5-3.5	IIIa	4.5-9	30	-10 to +50
LXG6507AH-X9	650	5-7	IIIb	4.5-9	45	-10 to +50
LXG65012AH-X9	650	10-12	IIIb	4.5-6	80	-10 to +50
LXG6701AH-X9	670	0.5-0.99	II	4.5-9	35	-10 to +50
LXG6704AH-X9	670	2.5-3.5	IIIa	4.5-9	35	-10 to +50
LXG7804AH-X9	780	2.5-3.5	IIIb	4.5-9	35	-10 to +50
LXG78025AH-X9	780	22-25	IIIb	4.5-6	90	-10 to +60
LXG8084AH-X9	808	2.5-3.5	IIIb	4.5-9	35	-10 to +40
LXG80825AH-X9	808	22-25	IIIb	4.5-6	95	-10 to +50
LXG8504AH-X9	850	2.5-3.5	IIIb	4.5-9	35	-10 to +50
LXG8507AH-X9	850	5-7	IIIb	4.5-9	45	-10 to +50
LXG9044AH-X9	904	2.5-3.5	IIIb	4.5-9	35	-10 to +50
LXG9047AH-X9	904	5-7	IIIb	4.5-9	45	-10 to +50
LXG9807AH-X9	980	5-7	IIIb	4.5-9	45	-10 to +40
LXG98012AH-X9	980	10-12	IIIb	4.5-6	80	-10 to +40

\*Optical output power before adding crosshair lens.

### Additional Notes

- The LXG-X9 series laser modules are designated solely as OEM components for incorporation into the customer's end products. Therefore, it is the customer's responsibility to comply with the appropriate requirements of FDA 21CFR, section 1040.10 and 1040.11 for complete laser products. For the code of FDA regulations, please refer to [FDA Performance Standards for Light-Emitting Products](#) for detailed information.
- Additional heat sink may be needed if the laser module is operated continuously for a long period of time.
- Specifications are subject to change without notice.