




## MDOE850A200R103 850nm DOE Laser Module

With Diffractive Optical Element 10,000 Random Dot Pattern, 3V PCB Driver

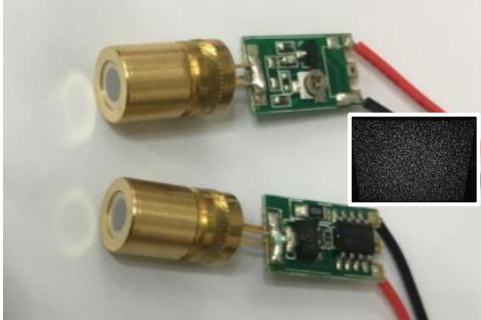

### Overview

The MDOE850 series laser module is an 850nm laser module that can be integrated with different collimating DOE types. Designed for R&D purposes, the laser module comes with an adjustable focusing lens and with adjustable current to set the output power within a certain range.

### Features

- Low distortion high uniform pattern
- Flexible package for R&D evaluation
- Distance tunable projection
- PWM drivable
- IEC 60825 eye safety standards

### Applications

- Structured light for 3D sensing
- Machine vision

### Specifications

Electrical-Optical Characteristics						
Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
Threshold current	$I_{th}$	-	18	30	mA	25 °C, $P_o=200mW$
Operating current	$I_{op}$	-	230	265	mA	25 °C, $P_o=200mW$
Operating voltage	$V_{op}$	-	2.1	2.3	V	25 °C, $P_o=200mW$
Slope efficiency	SE		0.95		mW/mA	$P_o=50-150mW$
Center wavelength	$\lambda_c$	840	850	860	nm	
Power input with PCB			3	3	V	25 °C, variable resistor included

Laser Diode Power Ratings				
Parameter	Symbol	Rating	Unit	Conditions
CW output power (max)		350	mW	
Operating temperature	$T_{op}$	-10 to 60	°C	
Storage temperature	$T_{stg}$	-40 to 85	°C	

Mechanical Characteristics	
Diameter	8mm
Length	14~15mm
PCB driver	9(W) x 12(L) x 3(H)mm

#### Notes:


- Length varies as the position of the collimating lens varies case by case.
- Total module length varies with the length of metal pins left after welding.

### Optical Specifications

**Lasermate Group, Inc.**

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: [info@lasermate.com](mailto:info@lasermate.com) | URL: <http://www.lasermate.com>



Total dots	10,000
Field of View (FOV)	59° x 46° (HxV)
Contrast <sup>1</sup>	≥3
Uniformity <sup>2</sup> in FOV at 1m	≥30%
Zero order	≤0.3%

<sup>1</sup> Contrast: in the defined area, the ratio of the 95th percentile of the grayscale value over the mode grayscale value of the background,  $C = I_{95\%} / I_{median}$


<sup>2</sup> Uniformity: the ratio of the grayscale value of the area at a given location to the grayscale value of the area in the center of the pattern,  $U = I_{each\ area} / I_{max\ of\ each\ area}$

### Typical Characteristics


## I-P curve of Chip

(Module optical power output is lower)

Optical Output Power v.s. Forward Current

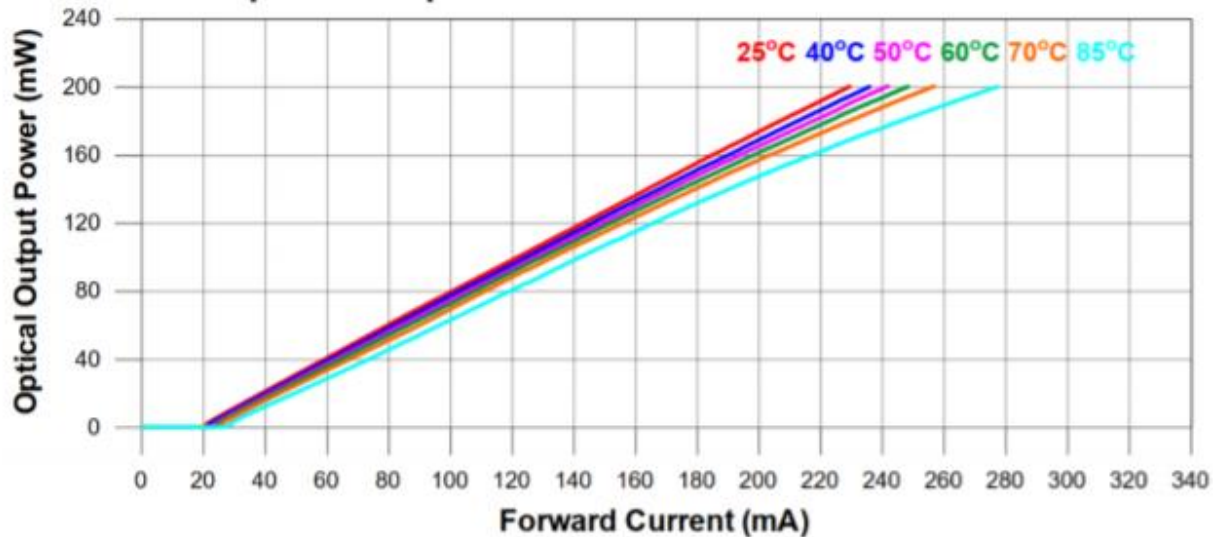

### Projection Pattern

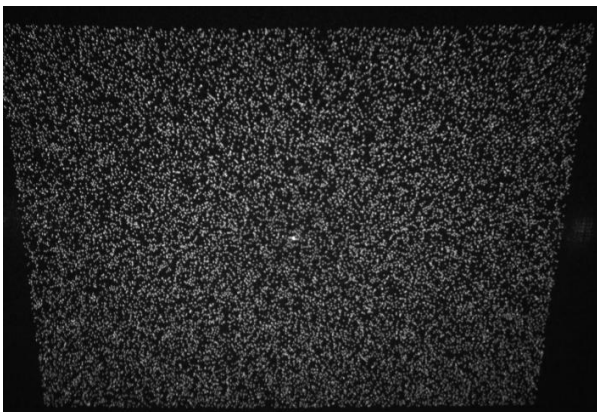


### Caution

**Lasermate Group, Inc.**

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: [info@lasermate.com](mailto:info@lasermate.com) | URL: <http://www.lasermate.com>



- Treat heat dissipation before setting the module to full power
- Avoid touching the emitting area or optical components of the module.
- Never look directly at the light from the emitting area.

## **Additional Notes**

- The laser modules are designated solely as OEM components for incorporation into the customer's end products. Therefore, it is the customer's responsibility to comply with the appropriate requirements of FDA 21CFR, section 1040.10 and 1040.11 for complete laser products. For the code of FDA regulations, please refer to [FDA Performance Standards for Light-Emitting Products](#) for detailed information.
- Specifications are subject to change without notice.