


## MW405D561 Series 405nm/561nm Dual Wavelength Laser System up to 200mW

### Overview

The MW405D561 series multi-wavelength laser is ideal for applications that require two wavelengths of 405nm and 561nm and output power levels up to 200mW. The laser emits up to two wavelengths from one aperture and with separate power monitors for each wavelength. The laser is widely used in life sciences, fluorescence, spectral analysis and optogenetics.

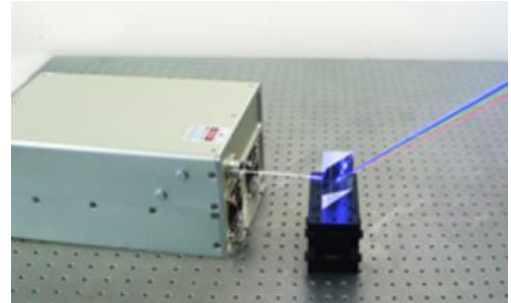

### Specifications

<b>Model Number</b>	<b>MW405D561-XPQ</b>	
Wavelength (nm)	Violet at 405nm, Yellow Green at 561nm	
Total output power (mW)	>20 ( <b>X=20</b> ), >50 ( <b>X=50</b> ), >100 ( <b>X=100</b> ), >200 ( <b>X=200</b> )	
Transverse mode	Near TEM <sub>00</sub> /TEM <sub>00</sub>	
Operating mode	CW	
Power stability (rms, over 4 hours)	<5% ( <b>P=A</b> ), <3% ( <b>P=E</b> ), <2% ( <b>P=2</b> )	
Beam diameter at aperture (1/e <sup>2</sup> , mm)	~2.5	
Beam divergence, full angle (mrad)	<1.5	
Warm-up time (minutes)	<10	
Beam height from base plate (mm)	24.8	
Operating temperature (°C)	10-35	
Dimensions of laser head (mm)	353(L)×211(W) ×136(H) mm <sup>3</sup>	
Weight of laser head (kg)	13.0 kg	
RGB Laboratory Power Supply	Input voltage	100-240VAC
	Dimensions	305.5(L) ×215(W) ×120(H) mm <sup>3</sup>
	Weight	5.0 kg
Modulation option		None ( <b>Q=0</b> )
	TTL	1Hz-1kHz ( <b>Q=T1</b> ), 1kHz-10kHz ( <b>Q=T2</b> ), 10kHz-30kHz ( <b>Q=T3</b> )
	Analog	1Hz-1kHz ( <b>Q=A1</b> ), 1kHz-10kHz ( <b>Q=A2</b> ), 10kHz-30kHz ( <b>Q=A3</b> )
Expected lifetime (hours)	10,000	
Warranty period	10 months	
FDA Compliance	FDA CDRH Title 21 CFR 1040.10/11 Class IIIb	


#### Remarks:

- Specifications of the CW laser is based on the laser performance at full power output after the specified warmup period. The stability of output power may change when output power is adjusted at a different power level.




**Outline Dimensions (unit: mm)**

**Laser Head**

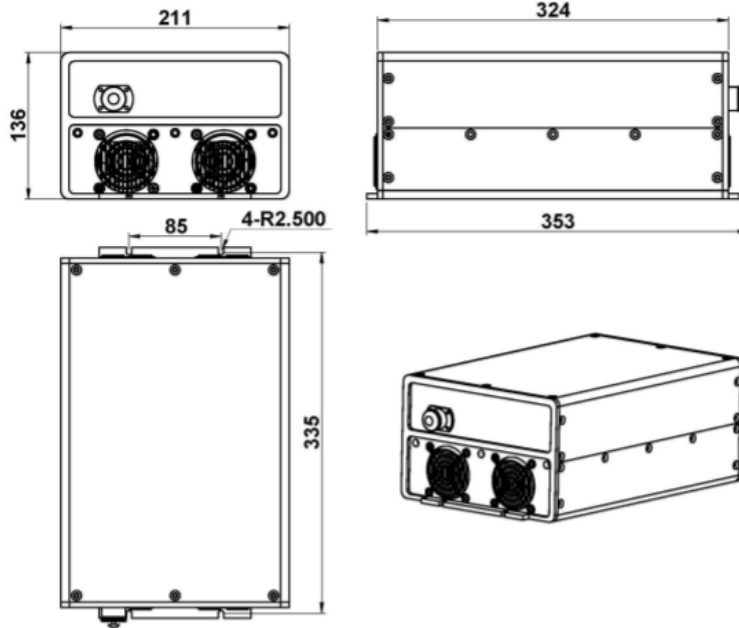

**Power Supply**

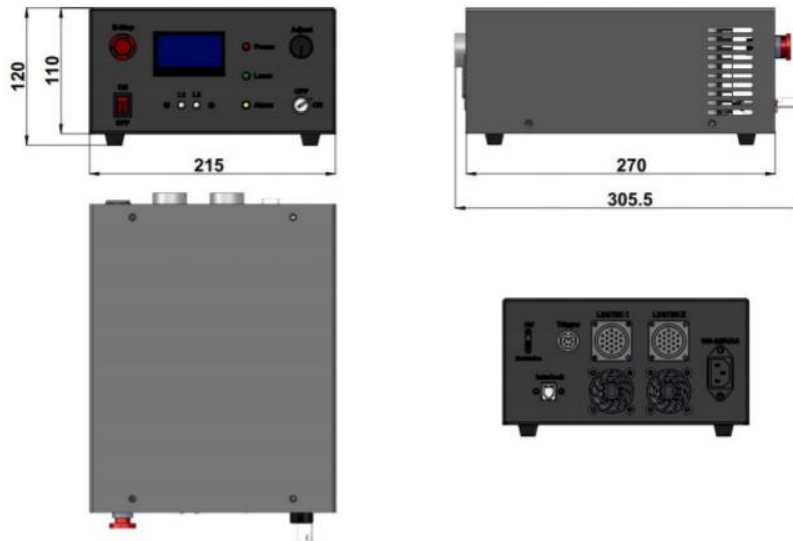

Note: The above specifications are subject to change without notice.