



QAOL1064 Series 1064nm Actively Q-Switched Laser System up to 1000uJ

Overview

The QAOL1064 series diode-pumped solid-state (DPSS) actively Q-switched AOM (Acousto-Optic Modulation) laser is ideal for applications that require a wavelength of 1064nm with single pulse energy levels up to 1000uJ. The laser features high peak power, high repetition rate and short pulse duration. The laser is widely used in laser inner carver, laser marking, scientific research, and many other applications.



Specifications

Model Number	QAOL1064-XYP	
Wavelength (nm)	1064±1	
Operating mode	Actively Q-switched AOM (Acousto-Optic Modulation)	
Average power (mW)	~1000 @ 1kHz (X=1W)	~5000 @ 10kHz (X=5W)
	Average power (mW) = Single pulse energy (µJ) * Rep. rate (kHz)	
Single pulse energy (µJ)	Up to ~1000	Up to ~500
Peak power (W)	Peak Power (W) = Single Pulse Energy (µJ) / Pulse Duration (µs)	
Ave power stability (rms, over 4 hours)	<5% (P=A), <3% (P=E), <2% (P=2), <1% (P=D)	
Pulse duration (ns)	Typically ~10 @ 1kHz	Typically ~10 @ 10kHz
Repetition rate (kHz)	0.001-1	1-10
Beam diameter at aperture (1/e ² , mm)	~1.0	
Beam divergence, full angle (mrad)	~2.5	
Polarization ratio	>100:1	
Warm-up time (minutes)	<10	
Cooled method	Air cooled	
Beam height from base plate (mm)	101	
Operating temperature (°C)	10-35	
Dimensions of laser head (mm)	261(L) x194(W) x127(H) mm ³	
Weight of laser head (kg)	5.4 kg	
Power supply		
AOM Power Supply (Y=AU)	Input voltage	220/110VAC
	Dimensions	483.5(L) x454(W) x147.5(H) mm ³
	Weight	8.3 kg
Expected lifetime (hours)	10,000	
Warranty	10 months	
FDA Compliance	FDA CDRH Title 21 CFR 1040.10/11 Class IV	


Remarks:

- Specifications of the Q-switched pulsed laser is based on the laser pulsed at the specified repetition rate. If the laser is run at a different repetition rate, the output characteristics may change.




Outline Dimensions (unit: mm)

Laser Head

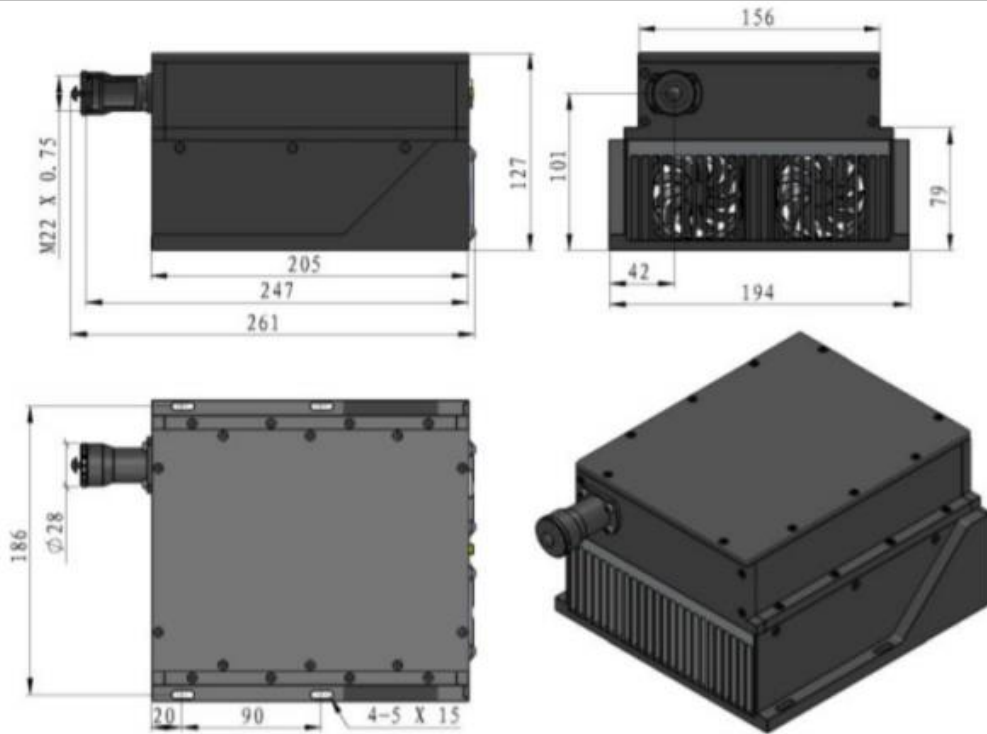

Power Supply

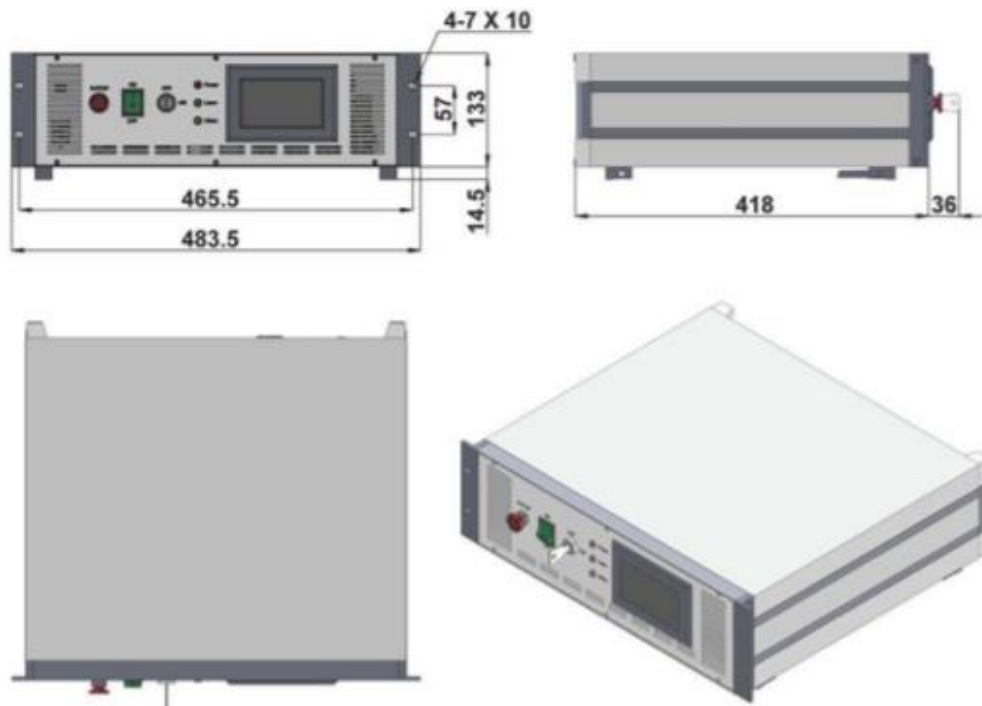

Note: The above specifications are subject to change without notice.