



QEOA1064 Series 1064nm High Energy DPSS Q-Switched Laser up to 10mJ

Overview

The QEOA1064 series high energy diode-pumped solid-state (DPSS) Q-switched EOM (Electro-Optic Modulation) laser is ideal for applications that require a wavelength of 1064nm and single pulse energy levels up to 10mJ. The laser features high single pulse energy, short pulse duration, and high peak power. The laser is widely used in LIBS, LIF, PIV, ICP-MS, LCD repair, scientific research, and many other applications.



Specifications


Model Number	QEOA1064-XYP	
Wavelength (nm)	1064±1	
Operating mode	Q-switched: EOM (Electro-optic modulation)	
Single pulse energy (mJ)	~5 (X=5), ~10 (X=10)	
Pulse duration (ns)	<10	
Repetition rate (Hz)	1-10, EXT (adjustable)	
Energy stability	<5% (P=A), <3% (P=E)	
Beam divergence, full angle (mrad)	<3	
Beam diameter (mm)	~3	
Warm-up time (minutes)	<15	
Operating temperature (°C)	15-30	
Beam height from base plate (mm)	34	
Cooled method	Conduction cooled	
Dimensions of laser head (mm)	198(L) x80(W) x60(H) mm ³	
Weight of laser head (kg)	1.5 kg	
Power supply options		
(Y=DA)	Input voltage	220V AC
	Dimensions	323(L) x 306(W) x106(H) mm ³
	Weight	6 kg
	Features	Repetition rate and current can be adjusted by touch screen.
(Y=DAI)	Input voltage	220V AC
	Dimensions	320(L) x200(W) x100(H) mm ³
	Weight	4 kg
Expected lifetime (pulses)	10 ⁹	
Warranty period	10 months	
FDA Compliance	FDA CDRH Title 21 CFR1040.10/11 Class IIIb	

Remarks:

- Specifications of the Q-switched pulsed laser is based on the laser pulsed at the specified repetition rate. If the laser is run at a different repetition rate, the output characteristics may change.



Outline Dimensions (unit: mm)

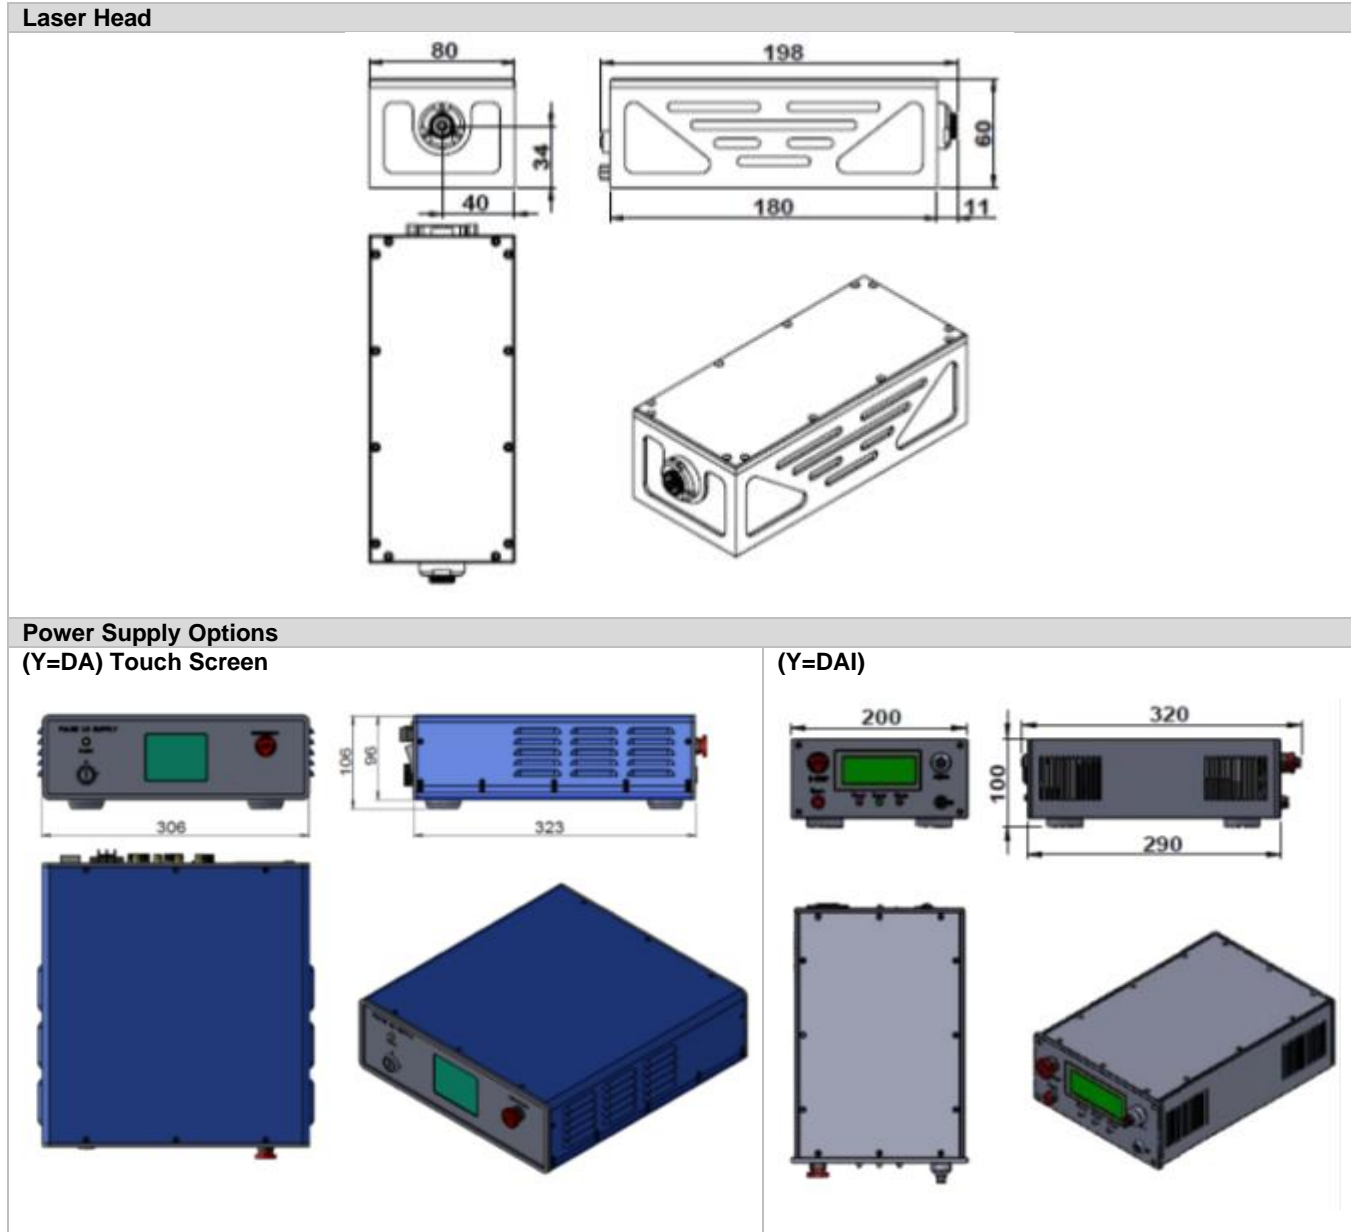

Note: The above specifications are subject to change without notice.