



## RAM375 Series 375nm Fiber Coupled Narrow Linewidth Laser for Raman Spectroscopy

### Overview

The RAM375 series fiber coupled diode laser is ideal for applications that require a wavelength of 375nm and output power levels up to 10mW. Designed specifically for Raman spectroscopy and with features of narrow spectral bandwidth, spectral purity and a high level of wavelength stability, the laser has integrated laser driver and thermoelectric cooler. Its compact dimensions and convenient functions make the laser optimal for industrial and medical applications.



### Specifications

Model Number		RAM375-XPY
Central wavelength (nm)		375±0.5
Operating mode		CW
Fiber core diameter		100um, 0.22 NA
Fiber connector		SMA905
Output power after fiber (mW)		>5 ( <b>X=5</b> ), >10 ( <b>X=10</b> )
Power stability (rms, over 4 hours)		<3% ( <b>P=E</b> ), <2% ( <b>P=2</b> ), <1% ( <b>P=D</b> )
Spectral linewidth (nm)		0.1 ( <b>Y=L</b> ), 0.06 ( <b>Y=M</b> )
Central wavelength stability (rms, over 2 hours) (pm)		<10
Noise of amplitude (rms, 1~20MHz)		<1%
Warm-up time (minutes)		<5
Operating temperature (°C)		20~30
Dimensions of laser (mm)		169(L)×115(W) ×52(H) mm <sup>3</sup>
Weight of laser (kg)		1.0 kg
Laser power consumption		5VDC@5A
Accessory (Adaptor)	Input voltage	85-264VAC
	Dimensions	120(L)×60(W) ×37(H) mm <sup>3</sup>
	Weight	0.3 kg
Expected lifetime (hours)		10,000
Warranty period		10 months
FDA Compliance		FDA CDRH Title 21 CFR 1040.10/11 Class IIIb


#### Remarks:

- Specifications of the CW laser is based on the laser performance at full power output after the specified warmup period. The stability of output power may change when output power is adjusted at a different power level.




**Outline Dimensions (unit: mm)**

**Laser Head**

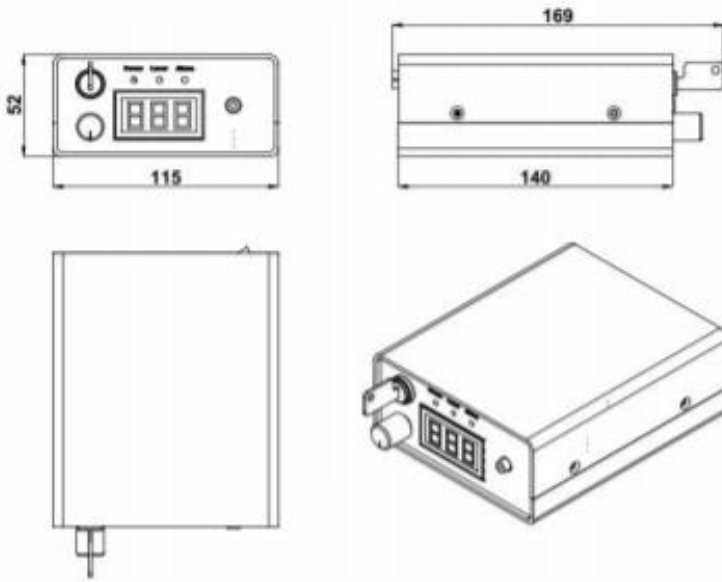

**Accessories**

**Adaptor**

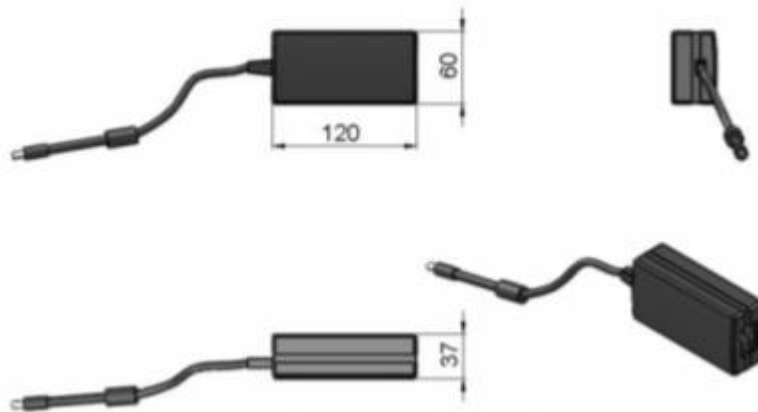

Note: The above specifications are subject to change without notice.