

Model No. RB3 Laser Safety Eyewear Product Specification

EN207 Certified. Visible Light Transmittance (VLT): 56% Teal

CE Rating

| Wavelength (nm) | L-Rating |
|-----------------|-----------------------|
| 180-315 | D LB5 + R LB4 |
| >315-400 | D LB4 |
| 625-665 | DIR LB1 |
| >665-693 | DIR LB2 |
| 694-700 | D LB4 + I LB7 + R LB6 |
| >700-710 | D LB4 + IR LB6 |
| >710-720 | DIR LB2 |




Optical Density

| Wavelength (nm) | OD |
|-----------------|------|
| 190-400 | 5+ |
| 630-665 | 1.5+ |
| 680-710 | 5+ |
| 685-705 | 6+ |
| 694 | 7+ |

Applications

- Medical
- Alignment

Spectrophotometer Data

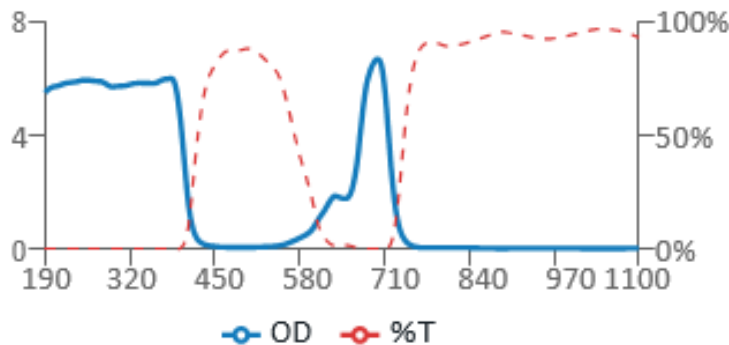

Note: The above specifications are subject to change without notice.



[Please see our website for all frame options.](#)