



## T80H-P3 Series 808nm Fiber Coupled Laser Diodes, 14W-25W

With MM Fiber and Multimode Beam

### Features

- 808nm laser diode
- Uncooled fiber-coupled CW module
- Multimode fiber output with ST/SMA connectors

### Applications





- Laser pumping
- Medical usage
- Printing
- Heating
- Material processing
- Marking



### Specifications (25°C)

Model Number	T80H-P3-X14W	T80H-P3-X25W
<b>Optical Specifications</b>		
CW Output Power from Fiber	14W	25W
Central Wavelength	800 - 820nm	
Spectral Width	<7nm	
Wavelength Temperature Coefficient	0.3nm/°C	
<b>Fiber Characteristics</b>		
Fiber Core Size	700µm	
N.A.	0.22	
Fiber Length	1m	
Connector	ST (X=ST); SMA-905 (X=SMA)	
<b>Electrical Characteristics</b>		
Slope Efficiency	>14W/A	>12W/A
Threshold Current	250mA	500mA
Operating Current	1200mA	2500mA
Operating Voltage	<35V	
Series Resistance	<3.5Ω	


### Mechanical Outline (unit: mm)

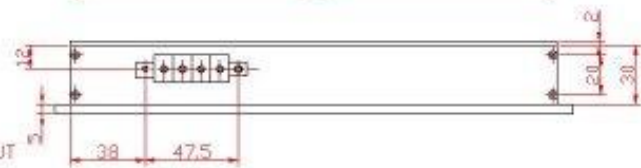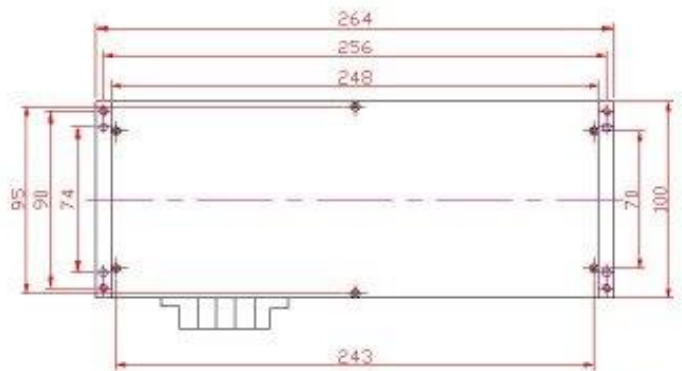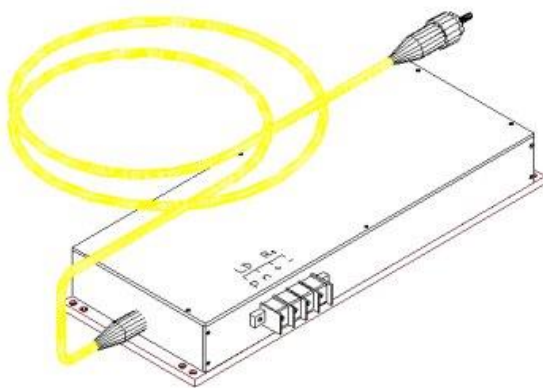



**Lasermate Group, Inc.**

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: [info@lasermate.com](mailto:info@lasermate.com) | URL: <http://www.lasermate.com>



## Typical Characteristics

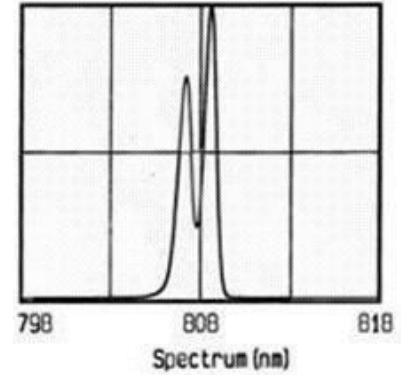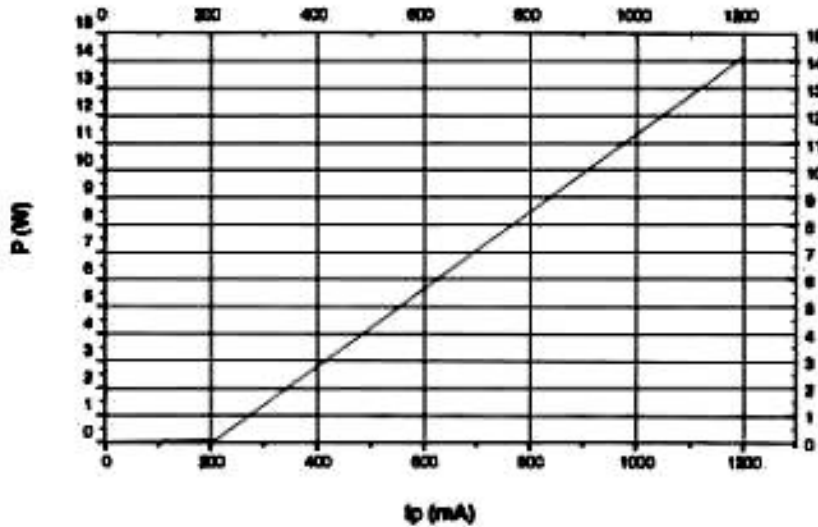

## Ordering Information

Part Number	Wavelength	Output Power	Operating Current	Fiber Core Size	Connector
T80H-P3-ST14W	808nm	14W	1200mA	700um	ST
T80H-P3-SMA14W	808nm	14W	1200mA	700um	SMA905
T80H-P3-ST25W	808nm	25W	2500mA	700um	ST
T80H-P3-SMA25W	808nm	25W	2500mA	700um	SMA905

## Additional Notes

- The laser diodes are designated solely as OEM components for incorporation into the customer's end products. Therefore, it is the customer's responsibility to comply with the appropriate requirements of FDA 21CFR, section 1040.10 and 1040.11 for complete laser products. For the code of FDA regulations, please refer to [FDA Performance Standards for Light-Emitting Products](#) for detailed information.
- Specifications are subject to change without notice.