

## Model No. TRI Laser Safety Eyewear Product Specification

EN207 Certified. Visible Light Transmittance (VLT): 22% Amber

### CE Rating

Wavelength (nm)	L-Rating
180-315	D LB7 + IR LB4
>315-400	DIRM LB5
>400-534	D LB5 + IRM LB6
720-770 + >850-1080	DIRM LB5
750-765 + 980-1065	D LB5 + IR LB7 + M LB7Y
>770-850	DIRM LB4




### Optical Density

Wavelength (nm)	OD
180-534	7+
720-770	5+
750-760	7+
770-850	4+
850-1080	5+
980-1064	7+

### Applications

- Medical
- Scientific
- Ultrafast

### Spectrophotometer Data

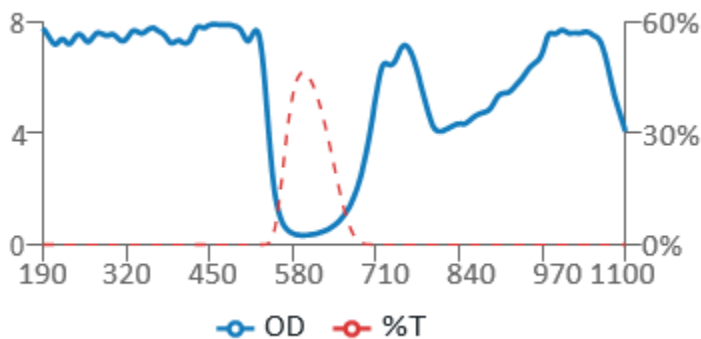

Note: The above specifications are subject to change without notice.



[Please see our website for all frame options.](#)

**Lasermate Group, Inc.**

19608 Camino De Rosa, Walnut, CA 91789, USA

Tel: (909)718-0999 | Fax: (909)718-0998 | E-mail: [info@lasermate.com](mailto:info@lasermate.com) | URL: <https://www.lasermate.com>