



1.25Gbps 850nm >1mW VCSEL in ST Receptacle with Monitor PD

Part No.TST-M85A426-2H

Features

- Industry standard connector of metallic ST*-type receptacle
- Pre-aligned for multi-mode fiber communication
- With monitoring PD
- Data rate operation from DC to 1.25Gbps
- >1mW at 6mA 850nm VCSEL




Specifications

Absolute Maximum Ratings				
Parameters	Min.	Max.	Unit	Conditions
Storage Temperature	-40	85	°C	
Operating Temperature	0	70	°C	
Lead Solder Temperature		260	°C	10 seconds
Continuous Forward Current		20	mA	
Continuous Reverse Voltage		5	V	

Electro-Optical Characteristics						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold Current	I_{th}		2	3.5	mA	
Wavelength	λ_P	830	850	860	nm	$I_F=6$ mA
Fiber Coupled Power	P_O	1	1.5		mW	$I_F=6$ mA
Forward Voltage	V_F	1.6	1.8	2.5	V	$I_F=6$ mA
Breakdown Voltage	V_{BD}	5	14		V	$I_R=10$ uA
Series Resistance	R_S	35	45	65	Ω	$I_F=6$ mA
Rise Time/Fall Time	T_r			0.15	ns	$I_b = I_{th}, 20\% \sim 80\%$
Spectral Width (RMS)	$\Delta\lambda$			0.85	nm	$I_F=6$ mA
Relative Intensity Noise	RIN			-122	dB/Hz	$I_F=6$ mA, $f=1$ GHz
Monitor Current	I_M		50		uA	



Outline Dimensions (unit: mm)

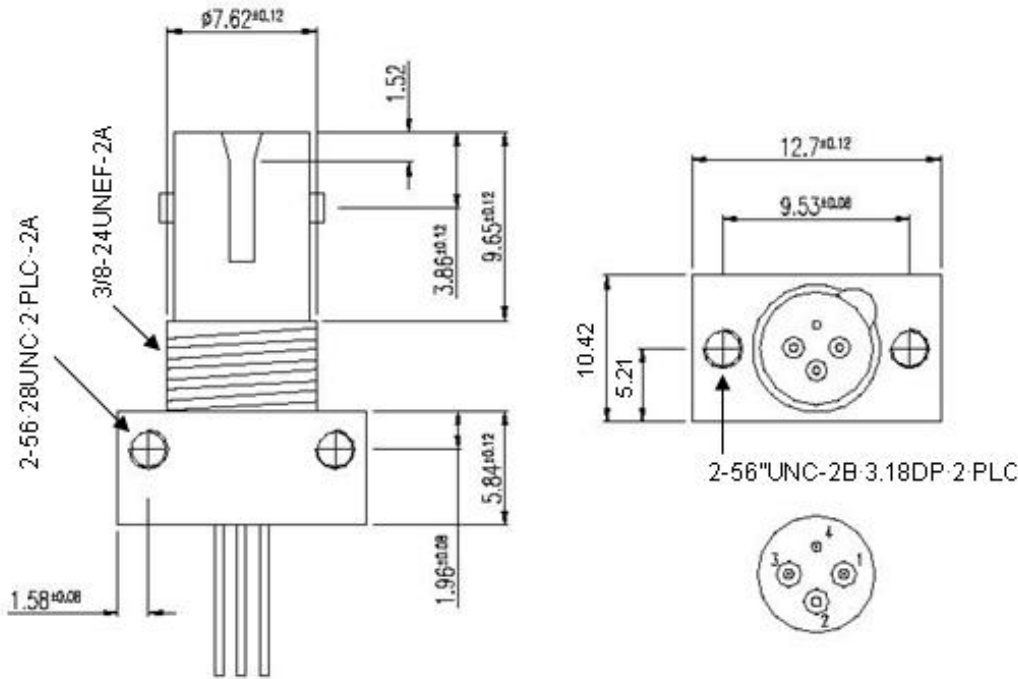

Pin Configuration

Pin Number	Function
1	VCSEL Cathode
2	VCSEL Anode/PD Cathode
3	PD Anode
4	Case

Additional Notes



The VCSEL is a class IIb laser in the safety standard ANSI Z136.1 and should be treated as a potential eye hazard.

Note: Specifications are subject to change without notice.