




## 940nm 2000mW VCSEL Diode in 3535 Package

Part No.VC35A-940H2WA

### Features

- 3535 package
- Low wavelength drift
- Low threshold current
- Oxide isolation technology
- High reliability and easy to collimate
- 2W 940nm VCSEL @ 2.5A



3535 Package, Substrate AlN

### Applications

- Lidar
- IR illumination
- 3D sensor
- Proximity sensor
- Medical application

### Specifications


Absolute Maximum Ratings				
Parameters	Symbol	Rating	Unit	Conditions
Case Operating Temperature	Top	-40 to 85	°C	
Storage Temperature	Tstg	-40 to 105	°C	
Reflow Soldering Temperature	Tsol	260	°C	10 seconds
Reverse Voltage	Vr	5	V	
Maximum Continuous Current	I <sub>max</sub>	6	A	
ESD Exposure (Human Body) Model	ESD	2K	V	

Notes:

- Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions above those indicated in the operations section for expanded periods of time may affect reliability.
- In its maximum rating diode laser operation could damage its performance or cause potential safety hazard such as equipment failure.
- Electrostatic discharge is the main reason for laser fault of the diode. Take effective precautions against ESD. When dealing with laser diodes, use wrist strap, grounding work surface and strict antistatic technology.

Electro-Optical Characteristics (T <sub>op</sub> =25°C)						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Optical Output Power	P <sub>o</sub>	-	2	-	W	I <sub>F</sub> =2.5A
Threshold Current	I <sub>th</sub>	-	0.2	-	A	
Forward current	I <sub>F</sub>	-	2.5	-	A	
Slope Efficiency	η	-	0.87	-	W/A	P <sub>o</sub> =4.0W
Power Conversion Efficiency	PCE	38	40	42	%	I <sub>F</sub> =2.5A
Peak Wavelength	λ <sub>P</sub>	930	940	950	nm	I <sub>F</sub> =2.5A
Laser Forward Voltage	V <sub>F</sub>	-	2.05	2.15	V	I <sub>F</sub> =2.5A
Series Resistance	R <sub>s</sub>	-	0.90	0.94	Ohm	I <sub>F</sub> =2.5A
Beam Angle	θ	-	20	25	Deg	I <sub>F</sub> =2.5A
Wavelength Temperature Drift	Δλ <sub>P</sub> / ΔT	-	0.07	-	nm/°C	I <sub>F</sub> =2.5A
Emission Area		-	532 x 632	-	um	
Rise/Fall Time		-	1	-	ns	
Soldering Temperature	Tsol			260	°C	10 seconds
Substrate					AlN	


Note: Electro-optical characteristic with a package or diffuser would require further evaluation. Values are based on limited sample size and estimated values.




Environmental Specifications						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Case Operating Temperature	Top	-40	25	85	°C	
Storage Temperature	Tstg	-40	25	105	°C	

### Typical Characteristics


LIV Graph

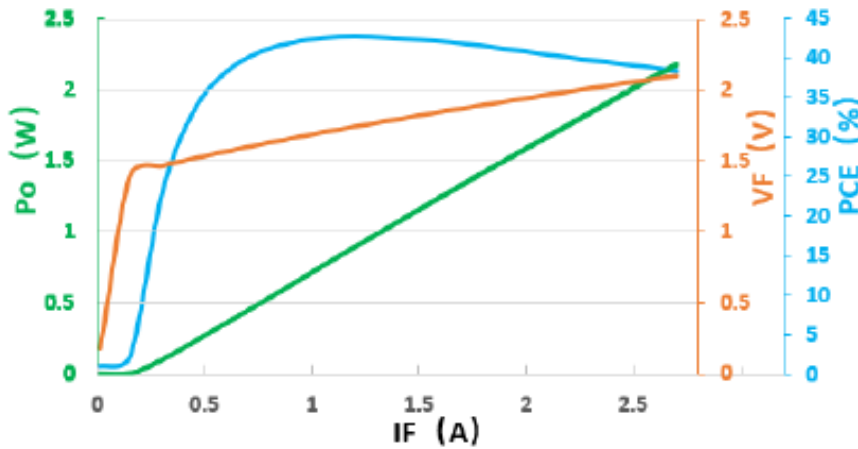


Intensity vs. Wavelength

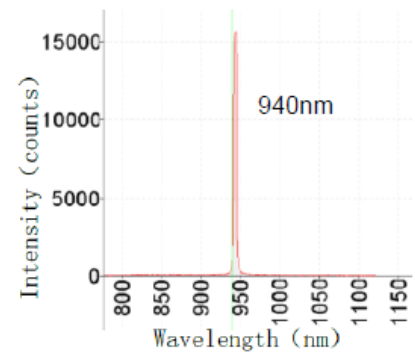


### Outline Dimensions (unit: mm)

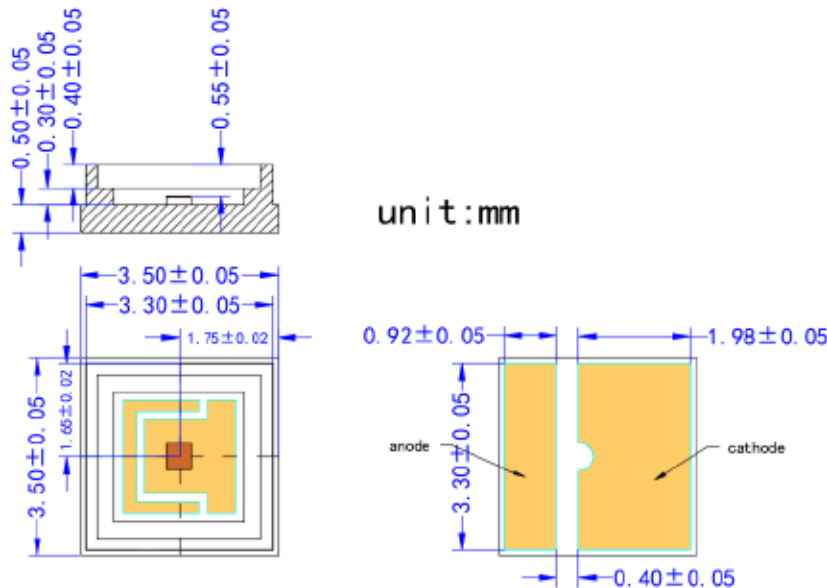



## SMT Reflow Soldering Curve

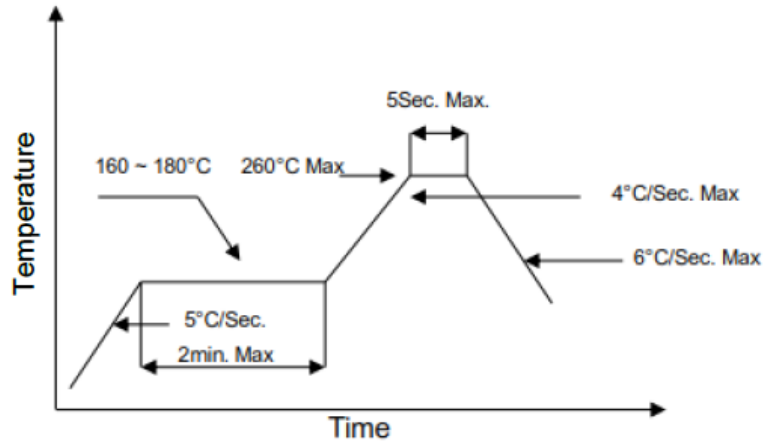

Note: Reflow soldering can be operated only one time. During the temperature ramp-up, no forces may be exerted on the LD which would deform or damage them. After soldering is completed, please do not process until the product temperature ramps down to room temperature.

## Additional Notes

1. Please use solder paste to cure the laser diode.
2. Please make sure that the heat of VCSEL diode has been completely conducted to metal shell to avoid affecting the optical power output.
3. This VCSEL diode can be only used in constant voltage and current.
4. Please do not aim the laser at people or animals.
5. You may observe the laser spot through an image monitoring equipment.
6. Please do not touch VCSEL diode surface by naked hands or squeeze the sealant on VCSEL diode surface. It may cause wrong optical angle and distorted laser spot, and even damage the VCSEL diode.
7. Please use ceramic suction nozzle to absorb the VCSEL diode, so as to avoid VCSEL diode sticking to the nozzle.
8. Please add a 0.02s blowing action after locating the laser diode to aluminum substrate.
9. Specifications are subject to change without notice.