

## 660nm 30mW 70°C Laser Diode in TO-18 $\phi$ 5.6mm Package

Part No. LD660A30C17

### FEATURES

- 660nm 30mW CW InGaAlP Diode
- Package: TO-18 (dia. 5.6mm)
- Built-in photodiode for monitoring laser diode

### APPLICATIONS


- Standard speed DVD-R/+R
- DVD-RW/+RW
- DVD-RAM
- DVD-Recorder
- High Speed DVD-player
- Industrial bar code scanner

### ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Condition	Rating	Unit
Optical output power	$P_O$	CW	35	mW
Reverse voltage (LD)	$V_{RL}$	-	2	V
Reverse Voltage (PD)	$V_{RD}$	-	30	V
Operating temperature	$T_{opr}$	-	-10 to +70	°C
Storage temperature	$T_{stg}$	-	-40 to +85	°C

### ELECTRICAL AND OPTICAL CHARACTERISTICS ( $T_c = 25^\circ\text{C}$ )


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Lasing wavelength	$\lambda_p$	-	658	665	nm	$P_O = 30\text{mW}$
Threshold current	$I_{th}$	-	35	50	mA	-
Operating current	$I_{op}$	-	65	100	mA	$P_O = 30\text{mW}$
Monitor Current	$I_m$	0.05	0.30	1.50	mA	$P_O = 30\text{mW}$
Differential Efficiency	$\eta$	0.7	1.0	1.3	mW/mA	20-30mW
Operating voltage	$V_{op}$	2.0	2.4	2.7	V	$P_O = 30\text{mW}$
Parallel divergence angle	$\Theta_{//}$	7	9.5	14	deg	$P_O = 30\text{mW}$
Perpendicular divergence angle	$\Theta_{\perp}$	18	22	27	deg	$P_O = 30\text{mW}$
Parallel FFP deviation angle	$\Delta \Theta_{//}$	-3	0	+3	deg	$P_O = 30\text{mW}$
Perpendicular FFP deviation angle	$\Delta \Theta_{\perp}$	-3	0	+3	deg	$P_O = 30\text{mW}$
Emission point accuracy	$\Delta x \Delta y \Delta z$	-60	0	+60	um	



**MECHANICAL OUTLINE (unit: mm)**

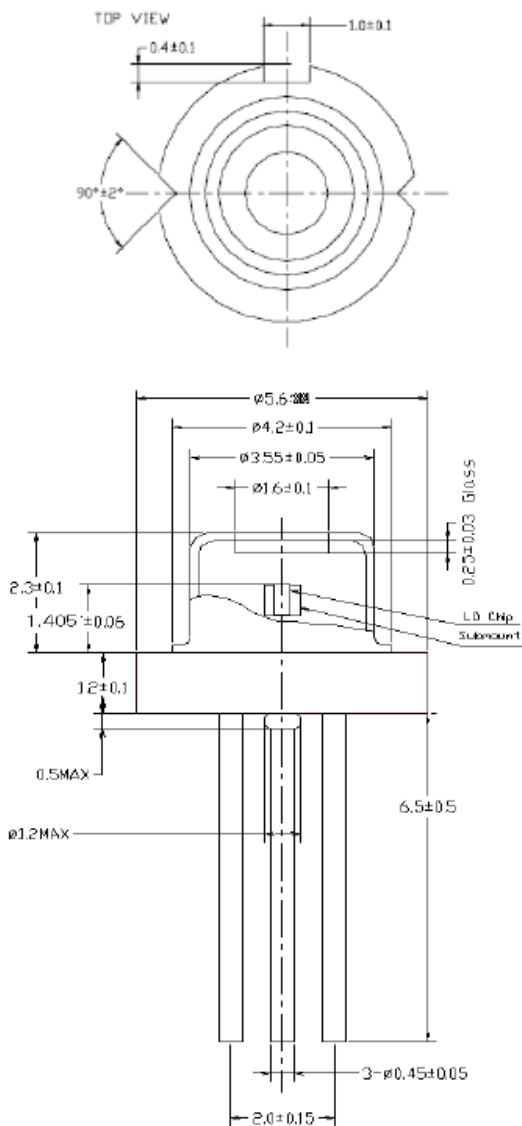

**Pin Configuration**



**ADDITIONAL NOTES**

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.