

## 808nm 400W High Power QCW Macro-Channel Water-Cooled Horizontal Linear Diode Laser Array

Part No. LDH808Q400WA

### OVERVIEW

The LDH-series high power packaged bars provide OEM customers with scalable power up to kilowatts for pumping, industrial and medical applications. The packaged laser bars can be configured for enhanced brightness through stacking, scaled linearly or vertically for optimized light and material integration.


### FEATURES

- 808nm Macrochannel Water-Cooled Horizontal Array
- QCW Operation
- High output power: 400W
- Spectral width: <5 nm
- High reliability, High efficiency
- Modular and compact design for ease of integration
- Packaged 10mm laser diode bar




### SPECIFICATIONS (T<sub>c</sub> = 25°C)

Item	Parameter	LDH808Q400WA	Unit
Optical Parameter	Center wavelength	808	nm
	Operation mode	QCW	-
	Output power	400	W
	Output power/bar	100	W
	Spectral width	<5	nm
	Bar quantity	4	-
	Wavelength Temperature coefficient	0.28	nm/°C
	Pulse width	<500	µs
	Duty ratio	≤4	%
	Fast axis divergence	<39	deg
	Slow axis divergence	<10	deg
Electrical Parameter	Threshold current	<25	A
	Operating current	<110	A
	Operating voltage/Bar	<2.0	V
Thermal parameter	Operating temperature	15 to 35	°C
	Storage temperature	-10 to +60	°C



**MECHANICAL OUTLINE (unit: mm)**

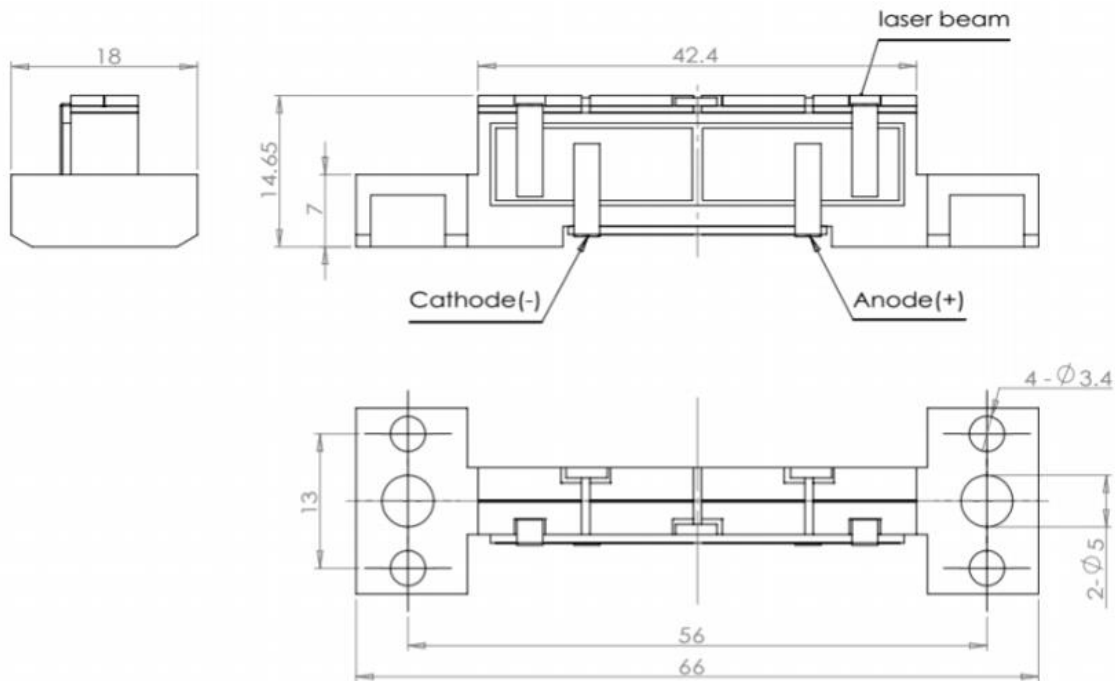

**Notes:**

1. The above specifications are subject to change without notice.
2. Please make sure that the laser diode is operated under the temperature between 15 °C and 35 °C, as high temperature will increase threshold current, decrease exchange rate and accelerate the aging.
3. Please take measures to avoid condensation, which will cause aging of laser diode.