



Analog 1550nm DFB Laser Diode TOSA

Model No. T15DA-XYZ-WM-I

Read Model No.	T15DA-XYZ-WM-I
T15DA = Laser	Analog 1510nm DFB laser
X = Package	Pigtailed with 9/125um SM fiber (X=P); Receptacle (X=R)
Y = Connector	None (Y=NO); FC/PC (Y=FC); SC/PC (Y=SC); ST/PC (Y=ST); LC/PC (Y=LC); FC/APC (Y=FA); SC/APC (Y=CA); ST/APC (Y=TA)
Z = Output power	>1mW (Z=H); >2mW (Z=2)
W = Pin configuration	A pinout (W=A)
M = Mount	For Receptacle: (M=R) For Pigtail: No flange (M=0); Horizontal mount (M=1)
I = Isolator	With isolator (I=I)

Features

- InGaAsP/InP MQW-DFB laser diode (LD)
- Data Rate: 155Mbps up to 2.5Gbps
- Uncooled operation at -20 to 85°C
- Hermetically sealed active component
- Built-in high performance, high speed InGaAs monitor PIN photodiode (PD)
- With single-stage isolator




Packaging

- Single-mode Fiber pigtailed with optional FC/ST/SC/LC connector
- FC/ST receptacle package with 2-hole flange

Applications

- ATM/SONET OC-3/OC-12/OC-24
- SDH STM-1/STM-4/STM-8
- Gigabit Ethernet
- Wireless (CDMA, GSM, PCS) and Analog applications





Specifications


Absolute Maximum Ratings					
Parameters	Symbol	Value	Unit	Conditions	
Storage temperature	Tstg	-40 to +85	°C		
Operating case temperature	Top	-20 to +85	°C		
Peak optical output power	Po	5	mW		
Forward current (LD)	IFLD	100	mA		
Reverse voltage (LD)	VRLD	2	V		
Reverse current (PD)	IRPD	5	mA		
Reverse voltage (PD)	VRPD	15	V		
Soldering temperature	Stemp	260	°C	10 seconds	

Electro-Optical Characteristics (CW @ T _c = 25°C unless otherwise noted)						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Central wavelength	λ_c	1540	1550	1560	nm	CW, Pf
Side mode suppression ratio	SMSR	30	40	-	dB	Pf
Spectral width	$\Delta\lambda$	-	0.2	1	nm	Pf
Threshold current	I _{th}	-	10	15	mA	CW
Fiber output power	Pf	1.0			mW	CW, I _f =I _{th} +20mA
		2.0				
Operating voltage	Vop	-	1.1	1.5	V	Pf
Rise time / Fall time	t _r /t _f	-	0.1	0.2	nsec	I _b = I _{th} , 20%~80%
Monitor current	I _m	100	-	1000	uA	Pf, V _{rp} =5V
Monitor dark current	I _d	-	0.1	100	nA	V _{rp} =5V
Monitor capacitance	C	-	10	20	pF	V _{rp} =5V, f=1MHz
Relative intensity noise	RIN	-	-154	-145	dB/Hz	CW, P _{op} =2.0mW, f=2200MHz
Second-order intermodulation	IMD2	-	-	-45	dBc	Two-tone, OMI=20%/tone, f=2200MHz & 2202.5MHz
Third-order intermodulation	IMD3	-	-	-56	dBc	Two-tone, OMI=20%/tone, f=2200MHz & 2202.5MHz
Tracking error*	$\Delta Pf / Pf$	-	±1.0	±1.5	dB	APC, T _c =-40~+85°C

*I_m=constant @ Pf, T_c=25 °C


Fiber Pigtail Specifications						
Parameters	Symbol	Min.	Typ.	Max.	Unit	
Fiber type	Single Mode Fiber (Flame Retardant Hytrel Coating)					
Cladding diameter	Dcl	122	125	128	um	
Mode field diameter	Dmf	-	10	-	um	
Coating diameter	Dbc	-	0.9	1	mm	
Pigtail length*	L	0.9	1.0	1.1	m	
Bending radius	Rb	30	-	-	mm	
Connector	TBD					

*From the ferrule-end to the bottom of TO-header.




Outline Dimensions (unit: mm)





Pigtail:

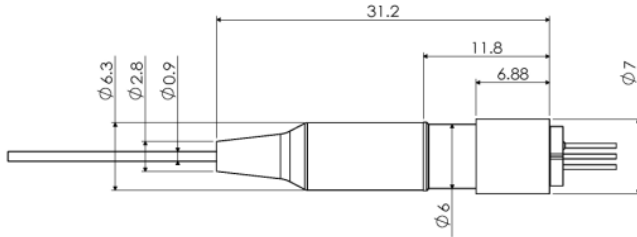


P.C.D. 2.0 ± 0.5

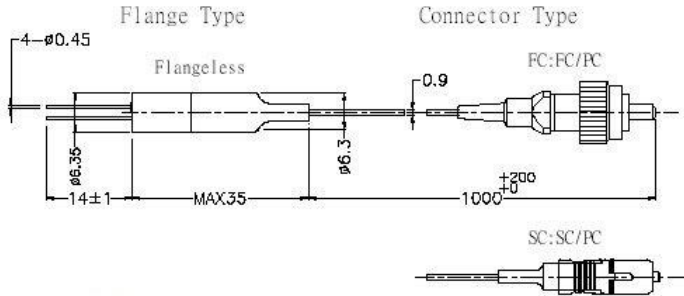


Horizontal (Omega Housing)

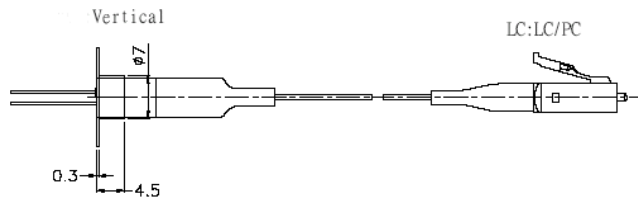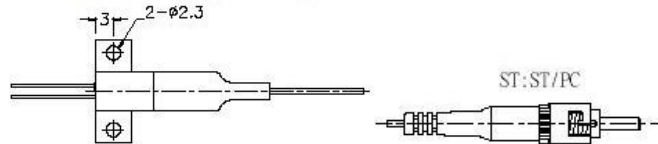


Horizontal Mount:

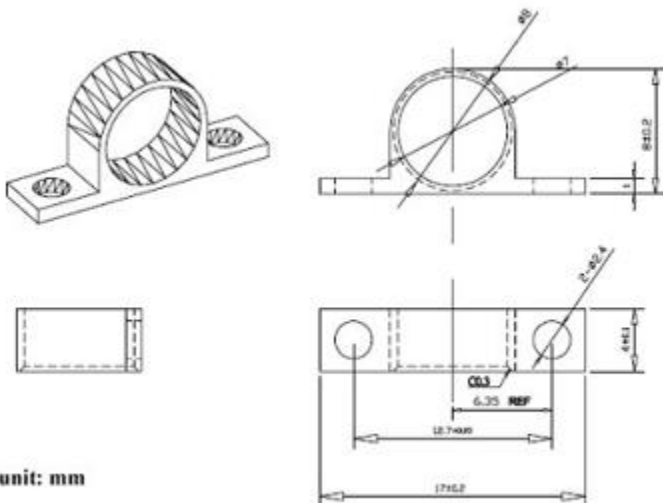


unit: mm



Receptacle:

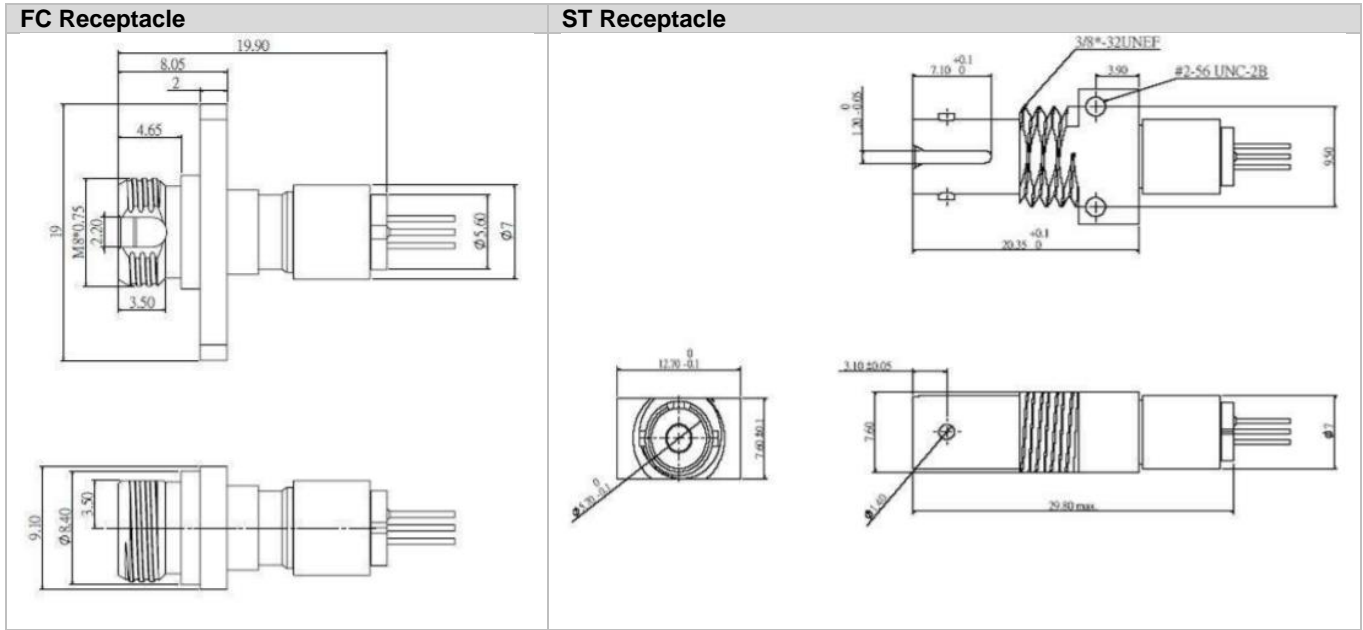

Pin Assignment

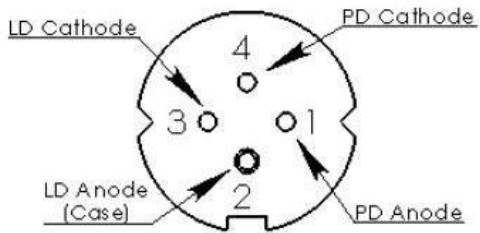

Type A

Pin Number	Type A
1	PD Anode
2	LD Anode (case)
3	LD Cathode
4	PD Cathode

Note: Specifications are subject to change without notice.